



INSPIRED BY
JAPANESE INNOVATION

HOME APPLIANCES | KITCHEN APPLIANCES
ELECTRONICS | ELECTRICAL | PERSONAL CARE | COOKWARE
TOOLS | LED SCREENS | BATTERY | HVAC | PUMPS
WATCHES | MEDICAL DEVICES | CCTV

ELECTRONICS

ABOUT US

Afra is a part of the AWS Group, headquartered in Dubai, UAE. AWS was founded by Mr. Abdulwahed Bin Shabib, and currently holds several brands in fields such as supermarkets, hypermarkets, groceries, and catering, as well as non-food categories like healthcare, real-estate, and engineering. Afra is one of the latest brands formed under the AWS Group and is a fast growing consumer electronics brand inspired by Japanese innovations and launched with the aim of providing home electronics and appliances that are both high quality and dependable, at attractive prices.

VISION

At AFRA Japan, we envision a future where home life is effortlessly convenient, sustainable, and enjoyable. We are committed to redefining the way people experience their homes by providing innovative, reliable, and Eco-conscious home appliances that elevate everyday living. Our vision is to become the trusted partner in every household, empowering individuals to embrace a lifestyle that seamlessly integrates technology, sustainability, and comfort, setting new standards for the modern home.

MISSION

At AFRA Japan, our mission is to revolutionize the way people experience home life by providing innovative and sustainable home appliance solutions that enhance comfort, convenience, and well-being. We are committed to innovation, sustainability, and quality, ensuring our customers can depend on our appliances for years to come. With a relentless commitment to these principles, we aim to not only improve the everyday lives of our customers but also contribute to a more sustainable and connected world. Together, we are shaping the future of home appliances and redefining what it means to live comfortably and responsibly.

A AFFORDABLE
F FUTURISTIC
R RELIABLE
A APPLIANCES

INDEX

Televisions	4 - 5
Bluetooth Speakers	6 - 7
Air conditioner Air cooler	9 - 12
Refrigerators Chest Freezer	13 - 16
Washing Machine	17 - 19
Cooking Range	20 - 22
Chest Freezer Electric Oven Microwave Oven	22 - 24
Rice Cooker	25 - 26
Air Fryer Deep Fryer BBQ Grill	27 - 28
Toasters Sandwich Maker	29 - 30
Juicer Blender Chopper	31 - 35
Juicer	29
Blender	30 - 32
Hand Blender	33
Kettle	34 - 35
Coffee Maker Coffee Grinder Stand Mixer Hand Mixer Meat Grinder	36 - 37
Citrus Juicer Vaccum Cleaner	38 - 39
Steam Iron Dry Iron	40 - 41
Water Dispenser Garment Steamer	42 - 43
Emergency Light	44 - 45
Fans Bulb	46 - 47
Flash Lights	48 - 49
Personal Care	50 - 55
USB Cables Charger	56 - 59
Fans Extension Sockets	60 - 61
Medical Devices	62 - 64



AF-85114-KBK

Specifications

TV Type and Size	85" UHD SMART TV (4K)
Resolution (ppi)	3840 x 2160
Flexible placement	Smart LED TV
Aspect Ratio	16:9
HDMI / USB / OS	3 / 2 / Android 11
Frame-less Bezel	VGA Slot to connect laptop/PC
Headphone Jack, 2 AV Input Slot	Integrated Dual Speakers
Product Dimensions (mm)	2090 x 260 x 1270
Net weight / Gross weight (Kg)	40 / 43
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-75114-KBK

Specifications

TV Type and Size	75" UHD SMART TV (4K)
Resolution (ppi)	3840 x 2160
Flexible placement	Smart LED TV
Aspect Ratio	16:9
HDMI / USB / OS	3 / 2 / Android 11
Frame-less Bezel	VGA Slot to connect laptop/PC
Headphone Jack, 2 AV Input Slot	Integrated Dual Speakers
Product Dimensions (mm)	1682 x 68 x 1270
Net weight / Gross weight (Kg)	30 / 33
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-65114-KBK

Specifications

TV Type and Size	65" UHD SMART TV (4K)
Resolution (ppi)	3840 x 2160
Flexible placement	Smart LED TV
Aspect Ratio	16:9
HDMI / USB / OS	3 / 2 / VIDAA 6.0 (Netflix/ YouTube)
Frame-less Bezel	VGA Slot to connect laptop/PC
Headphone Jack, 2 AV Input Slot	Integrated Dual Speakers
Product Dimensions (mm)	1446 x 79.3 x 834.6
Net weight / Gross weight (Kg)	16.12 / 43
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-55114-KBK

Specifications

TV Type and Size	55" UHD SMART TV (4K)
Resolution (ppi)	3840 x 2160
Flexible placement	Smart LED TV
Aspect Ratio	16:9
HDMI / USB / OS	3 / 2 / Android 11
Frame-less Bezel	VGA Slot to connect laptop/PC
Headphone Jack, 2 AV Input Slot	Integrated Dual Speakers
Product Dimensions (mm)	1227 x 74 x 704.5
Net weight / Gross weight (Kg)	16 / 17.5
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-50114KBK

Specifications

TV Type and Size	50" UHD SMART TV (4K)
Resolution (ppi)	3840 x 2160
Flexible placement	Smart LED TV
Aspect Ratio	16:9
HDMI / USB / OS	3 / 2 / Android 11
Frame-less Bezel	Ultra-slim thin frame
Headphone Jack, 2 AV Input Slot	Powerful Sound with Equalizer
Product Dimensions (mm)	1111 x 745 x 604
Net weight / Gross weight (Kg)	6.82 / 7.5
Voltage (V, Hz)	AC 110-240V. 50/60Hz

AF-43114KBK

Specifications

TV Type and Size	43" UHD SMART TV (4K)
Resolution (ppi)	3840 x 2160
Flexible placement	Smart LED TV
Aspect Ratio	16:9
HDMI / USB / OS	3 / 2 / Android 11
Frame-less Bezel	Ultra-slim thin frame
Headphone Jack, 2 AV Input Slot	Powerful Sound with Equalizer
Product Dimensions (mm)	955 x 720 x 553
Net weight / Gross weight (Kg)	6.82 / 7.5
Voltage (V, Hz)	AC 110-240V. 50/60Hz

AF-3211HDBK

Specifications

TV Type and Size	32" Smart TV (HD)
Resolution (ppi)	1366 x 768
Flexible placement	Smart LED TV
Aspect Ratio	16:9
HDMI / USB / OS	3 / 2 / Android
Frame-less Bezel	Normal frame
Headphone Jack, 2 AV Input Slot	Powerful Sound with Equalizer
Product Dimensions (mm)	728 x 75 x 429
Net weight / Gross weight (Kg)	3.42 / 5.5
Voltage (V, Hz)	AC 110-240V. 50/60Hz

AF-3200-HDBK

Specifications

TV Type and Size	32" TV (HD)
Resolution (ppi)	1366 x 768
Flexible placement	LED TV
Aspect Ratio	16:9
HDMI / USB / OS	3 / 2
Frame-less Bezel	Normal frame
Headphone Jack, 2 AV Input Slot	Powerful Sound with Equalizer
Product Dimensions (mm)	728 x 75 x 429
Net weight / Gross weight (Kg)	3.42 / 5.5
Voltage (V, Hz)	AC 110-240V. 50/60Hz

ELECTRONICS

BLUETOOTH SPEAKERS

BLUETOOTH SPEAKER



AF-300PSBK

Specifications

Watts	300W RMS
Bluetooth (version)	5.0
Connector	Auxin (3.5mm) and Aux out (3.5mm), TYPE-C, charging
Play time	Upto14hoursat 50% Power
Play mode	BT / AUX / USB /MIC/ FM Radio
Battery Size / Total power	12V, 12A, USB charging
Karaoke Input	MIC x1 / Guitar Input x1
Product size (mm)	362 x 890 x 360
Net / Gross weight (Kg)	24.95 / 26

BLUETOOTH SPEAKER



AF-120PSBK

Specifications

Watts	120W RMS
Bluetooth (version)	5.0
Connector	Auxin (3.5mm) and Aux out (3.5mm), (TYPE-C playback x1)
Play time	Upto12hours at 50% Power
Play mode	BT / AUX / USB /MIC/ FM Radio
Battery Size / Total power	12V 12000mAh, USB charging
Karaoke Input	MIC x1 / Guitar Input x1
Product size (mm)	362 x 890 x 360
Net / Gross weight (Kg)	24 / 25

BLUETOOTH SPEAKER



AF-100PSBK

Specifications

Watts	100W RMS
Bluetooth (version)	5.0
Bluetooth (distance)	≥10m (open distance)
Play time	Volume50% (Lights off) 10H
Product size (mm)	308 x 308 x 685
Play mode	BT / AUX / USB /MIC/ FM Radio
Battery Size / Total power	12V, 4.5A, USB charging
Karaoke Input	MIC x1 / Guitar Input x1
Net / Gross weight (Kg)	13 / 14

BLUETOOTH SPEAKER



AF-60TSBK

Specifications

Watts	60W RMS
Bluetooth (version)	5.0
Play time	Upto12 hours at 50% Power
Play mode	BT / AUX / USB /MIC/ FM Radio
Battery Size / Total power	7.4V 4000mAh
Support USB/TF card ,AUX IN,MIC Input With Bluetooth,FM,TWS, Record,EQ adjustment function	
Circle light flashing as music rhythm with 7 light modes and 7 light colors can be selected With remote control	
Product size (mm)	280 x 290 x 690
Net / Gross weight (Kg)	6.5 / 7.5



AF-0030BSBK

Watts	30W RMS
Bluetooth (version)	5.3
Bluetooth (distance)	≥10m (open distance)
Play time	Volume50% (Lights off) > 4H
Product size	251x255x326mm
Play mode	BT/AUX/ USB/MIC
Battery Size / Total power	7.4V / 3000mAh
Charging Input / Time	DC 9V-1.5A / 4 H(empty battery)
The horn	2.6 / 3



AF-0026BSBK

Specifications

Watts	26W RMS
Bluetooth (version)	5.3
Bluetooth (distance)	≥10m (open distance)
Play time	8 Hours
Product size (mm)	364 × 200 × 156
Play mode	BT/AUX/ USB/MIC
Battery Size / Total power	7.4V / 4000mAh
Charging Input / Time	DC 9V-1.5A / 4 H(empty battery)
TWS Function	AUX Input
Net / Gross weight (g)	2500 / 6950



AF-0024BSBK

Specifications

Watts	20W RMS
Bluetooth (version)	5.3 JL
Bluetooth (distance)	≥10m (open distance)
Play time	50%volume: 10H
Product size (mm)	228 x 103 x 97
Play mode	BT /AUX
Battery Size / Total power	13.7V / 1200mAh
Charging Input / Time	DC 5V-1A / 4 H (empty battery)
The horn	2.25"X2
Net / Gross weight (g)	1026 / 5001 - 10000



AF-0012BSBK

Specifications

Watts	10W RMS
Bluetooth (version)	5.3 JL
Bluetooth (distance)	≥10m (open distance)
Play time	Volume50% (Lights off) > 4H
Product size (mm)	224 × 94 × 94
Play mode	BT/AUX
Battery Size / Total power	4.7V / 3000mah
Charging Input / Time	DC 5V-1A / 4 H (empty battery)
The horn	2.25"X2
Net / Gross weight (g)	927 / 14000

BLUETOOTH SPEAKER

BLUETOOTH SPEAKER

BLUETOOTH SPEAKER

BLUETOOTH SPEAKER

ELECTRONICS

BLUETOOTH SPEAKER | AIR CONDITIONER

BLUETOOTH SPEAKER



AF-0005BSBK

Specifications

Watts	5W RMS
Bluetooth (version)	5.3
Bluetooth (distance)	≥10m (open distance)
Play time	Volume50% (Lights off) > 4H
Product size (mm)	110 x 74 x 73
Play mode	BT/AUX/ USB/MIC
Battery Size / Total power	13.7V / 1200mAh
Charging Input / Time	DC 5V / 2.5h
Net / Gross weight (g)	343 / 7800

BLUETOOTH SPEAKER



AF0010BSBK

Specifications

Watts	10W RMS
Bluetooth (version)	5.3
Bluetooth (distance)	≥10m (open distance)
Play time	Volume50% (Lights off) > 4H
Product size (mm)	160 x 78 x 50.5
Play mode	BT/AUX/ USB/MIC
Battery Size / Total power	7.4V / 3000mah
Charging Input / Time	DC 9V-1.5A / 4 H(empty battery)
The horn	6.5"x1+1.5"x1
Net / Gross weight (g)	334.5 / 835000



AF-1200PACWT

Specifications

Rated Capacity (Btu/H)	12000
Compressor Type	Piston
Rated current input (amp)	9.09
Climate Type / Air Flow	T3/700/600/550
Refrigerant Type	R410a
Dimension (Indoor WxDxH mm)	850 X 292 X 190
Dimension (Outdoor WxDxH mm)	810 X 355 X 595
Weight Indoor (Net /Gross Kg)	8.7 / 10
Weight Outdoor (Net /Gross Kg)	26 / 28
Voltage (V, Hz)	220-240V 50-60Hz



AF-1800PACWT

Specifications

Rated Capacity (Btu/H)	18000
Compressor Type	Piston
Rated current input (amp)	9.05
Climate Type / Air Flow	T3/1250/950/800
Refrigerant Type	R410a
Dimension (Indoor WxDxH mm)	970 X 310 X 230
Dimension (Outdoor WxDxH mm)	945 X 670 X 430
Weight Indoor (Net /Gross Kg)	11.7 / 13.7
Weight Outdoor (Net /Gross Kg)	36.6 / 39
Voltage (V, Hz)	220-240V 50-60Hz



AF-2400PACWT

Specifications

Rated Capacity (Btu/H)	24000
Compressor Type	Piston
Rated current input (amp)	9.04
Climate Type / Air Flow	T3/1450/1150/1000
Refrigerant Type	R410a
Dimension (Indoor WxDxH mm)	945 X 670 X 430
Dimension (Outdoor WxDxH mm)	945 X 670 X 430
Weight Indoor (Net /Gross Kg)	16 / 18.3
Weight Outdoor (Net /Gross Kg)	40.5 / 42.5
Voltage (V, Hz)	220-240V 50-60Hz



AF-2400ACWT

Specifications

Rated Capacity (Btu/H)	24000
Compressor Type	Rotary
Rated current input (amp)	10.1
Climate Type / Air Flow	T3/1600/1400/1100
Refrigerant Type	R410a
Dimension (Indoor WxDxH mm)	1130 X 361 X 252
Dimension (Outdoor WxDxH mm)	860 X 597 X 370
Weight Indoor (Net /Gross Kg)	16 / 18
Weight Outdoor (Net /Gross Kg)	41 / 42.5
Voltage (V, Hz)	220-240V 50-60Hz

SPLIT AC

SPLIT AC

SPLIT AC

SPLIT AC



AF-1800ACWT

Specifications

Rated Capacity (Btu/H)	18000
Compressor Type	Rotary
Rated current input (amp)	7.9
Climate Type / Air Flow	T3/1300/1200/1100
Refrigerant Type	R410a
Dimension (Indoor WxDxH mm)	970 X 310 X 230
Dimension (Outdoor WxDxH mm)	860 X 597 X 378
Weight Indoor (Net /Gross Kg)	11.2 / 13.3
Weight Outdoor (Net /Gross Kg)	37.5 / 40
Voltage (V, Hz)	220-240V 50-60Hz



AF-1200ACWT

Specifications

Rated Capacity (Btu/H)	12000
Compressor Type	Rotary
Rated current input (amp)	5.39
Climate Type / Air Flow	T3/1300/1200/1100
Refrigerant Type	R410a
Dimension (Indoor WxDxH mm)	850 X 292 X 190
Dimension (Outdoor WxDxH mm)	740 X 302 X 550
Weight Indoor (Net /Gross Kg)	8.5 / 9.7
Weight Outdoor (Net /Gross Kg)	25.5 / 28
Voltage (V, Hz)	220-240V 50-60Hz



AF-2400WACR

Specifications

Rated Capacity (Btu/H)	24000
Compressor Type	Rotary
Rated current input (amp)	12.56
Climate Type / Air Flow	T3/750/690/640
Refrigerant Type	R410a
Dimension (Indoor WxDxH mm)	58 / 56 / 54
Dimension (Outdoor WxDxH mm)	890 X 780 X 680
Weight Indoor (Net /Gross Kg)	660 x 676 x 428
Weight Outdoor (Net /Gross Kg)	53.5 / 57.7
Voltage (V, Hz)	220-240V 50-60Hz



AF-1800WACR

Specifications

Rated Capacity (Btu/H)	18000
Compressor Type	Rotary
Rated current input (amp)	9.04
Climate Type / Air Flow	T3/720/660/620
Refrigerant Type	R410a
Dimension (Indoor WxDxH mm)	57 / 55 / 53
Dimension (Outdoor WxDxH mm)	860 X 597 X 370
Weight Indoor (Net /Gross Kg)	16 / 18
Weight Outdoor (Net /Gross Kg)	41/ 42.5
Voltage (V, Hz)	220-240V 50-60Hz



AF-4800FSAC

Specifications

Rated Capacity (Btu/H)	48000
Compressor Type	Rotary
Rated current input (amp)	10.85 / 23.44
Climate Type / Air Flow	T3/1900/1550/1350
Refrigerant Type	R410a
Dimension (Indoor WxDxH mm)	1900 X 580 X 390
Dimension (Outdoor WxDxH mm)	970 X 375 X 805
Weight Indoor (Net /Gross Kg)	50 / 56
Weight Outdoor (Net /Gross Kg)	62 / 67
Voltage (V, Hz)	220-240V 50-60Hz

AF-3600FSAC

Specifications

Rated Capacity (Btu/H)	36000
Compressor Type	Rotary
Rated current input (amp)	15.9 / 19.62
Climate Type / Air Flow	T3/1400/1100/1000
Refrigerant Type	R410a
Dimension (Indoor WxDxH mm)	1745 X 480 X 350
Dimension (Outdoor WxDxH mm)	902 X 315 X 650
Weight Indoor (Net /Gross Kg)	40 / 44
Weight Outdoor (Net /Gross Kg)	51 / 55
Voltage (V, Hz)	220-240V 50-60Hz

AF-2400FSAC

Specifications

Rated Capacity (Btu/H)	24000
Compressor Type	Rotary
Rated current input (amp)	11.52 / 15.31
Climate Type / Air Flow	T3/1400/1100/1000
Refrigerant Type	R410a
Dimension (Indoor WxDxH mm)	1745 X 480 X 350
Dimension (Outdoor WxDxH mm)	820 X 597 X 330
Weight Indoor (Net /Gross Kg)	38 x 43
Weight Outdoor (Net /Gross Kg)	43.5 / 45.5
Voltage (V, Hz)	220-240V 50-60Hz

AF-9000PACWH

Specifications

Rated Capacity (Btu/H)	9000
Compressor Type	Refrigerant
Cooling / Heating Capacity (W)	2600 / 2400
Air Volume (m3/H)	300
Refrigerant Type	R290
Noise Level (db)	<65
Dimension (WxDxH mm)	330 X 292 X 704
Net / Gross Weight (KG)	22.5 / 24.5
Voltage (V,Hz)	220-240V 50-60Hz

FLOOR TYPE AC

FLOOR TYPE AC

FLOOR TYPE AC

PORTABLE AC

ELECTRONICS

AIR CONDITIONER | AIR COOLER | REFRIGERATOR



AF-120PACWH

Specifications

Rated Capacity (Btu/H)	12000
Compressor Type	Refrigerant
Rated current input (amp)	3500
Climate Type / Air Flow	380
Refrigerant Type	R410a
Noise Level (db)	<64
Dimension (WxDxH mm)	345 X 370 X 714
Weight (Net /Gross Kg)	25 / 28
Voltage (V, Hz)	220-240V 50-60Hz

AF-160COWT

Specifications

Total Power (W)	160
Water tank capacity (L)	12
Speed (m/s)	10.5
Air Flow (m3/h)	1800
Evaporation (m1/h)	900
Dimension (mm)	450 X 300 X 930
Weight (Net /Gross Kg)	10.8 / 13.4
Loading (20'/40'/40' HQ Units)	400 / 320 / 160
Voltage (V, Hz)	220-240V 50-60Hz

AF-80COWT

Specifications

Total Power (W)	80
Water tank capacity (L)	12
Speed (m/s)	10.5
Air Flow (m3/h)	950
Evaporation (m1/h)	500
Dimension (mm)	450 X 300 X 930
Weight (Net /Gross Kg)	9 / 11.6
Loading (20'/40'/40' HQ Units)	400 / 320 / 160
Voltage (V, Hz)	220-240V 50-60Hz

AF-9000PACWH

Specifications

Total Power (W)	60
Water tank capacity (L)	4
Speed (m/s)	8.5
Air Flow (m3/h)	750
Evaporation (m1/h)	400
Dimension (mm)	450 X 280 X 640
Weight (Net /Gross Kg)	4.7 / 7.2
Loading (20'/40'/40' HQ Units)	1030 / 900 / 440
Voltage (V, Hz)	220-240V 50-60Hz

PORTABLE AC

AIR COOLER

AIR COOLER

AIR COOLER



AF-4980RFSS

Specifications

Total Capacity (Ltr)	498
Fridge Capacity (Ltr)	407
Freezer Capacity (Ltr)	91
No-frost	Multi Air flow
Energy Consumption	605.9 kWh/Year
With Ice maker	Electrical temperature control
Dimensions (mm)	700 x 680 x 1845
Net / Gross weight (Kg)	74 / 78
Loading (40' HQ Units)	66
Voltage (V, Hz)	220-240V 50-60Hz



AF-3680RFSS

Specifications

Total Capacity (Ltr)	368
Fridge Capacity (Ltr)	275
Freezer Capacity (Ltr)	93
No-frost	Multi Air flow
Energy Consumption	456.3 kWh/Year
With Ice maker	Electrical temperature control
Dimensions (mm)	600 x 645 x 1730
Net / Gross weight (Kg)	58 / 63
Loading (40' HQ Units)	74
Voltage (V, Hz)	220-240V 50-60Hz



AF-3400RFSS

Specifications

Total Capacity (Ltr)	340
Fridge Capacity (Ltr)	247
Freezer Capacity (Ltr)	93
No-frost	Multi Air flow
Energy Consumption	693.5 kWh/Year
With Ice maker	Electrical temperature control
Dimensions (mm)	600 x 645 x 1610
Net / Gross weight (Kg)	55 / 60
Loading (40' HQ Units)	75
Voltage (V, Hz)	220-240V 50-60Hz



AF- 2200RFSS

Specifications

Total Capacity (Ltr)	220
Fridge Capacity (Ltr)	162
Freezer Capacity (Ltr)	58
No-frost	Multi Air flow
Energy Consumption	693.5 kWh/Year
With Ice maker	Electrical temperature control
Dimensions (mm)	600 x 645 x 1610
Net / Gross weight (Kg)	55 / 60
Loading (40' HQ Units)	75
Voltage (V, Hz)	220-240V 50-60Hz

REFRIGERATOR

REFRIGERATOR

REFRIGERATOR

REFRIGERATOR

ELECTRONICS

REFRIGERATOR | CHEST FREEZER



REFRIGERATOR

REFRIGERATOR

REFRIGERATOR

REFRIGERATOR

AF-2800RFSS

Specifications

Total Capacity (Ltr)	280
Fridge Capacity (Ltr)	220
Freezer Capacity (Ltr)	60
No-frost	Multi Air flow
Energy Consumption	584 kWh/Year
With Ice maker	Electrical temperature control
Dimensions (mm)	500 x 580 x 1665
Net / Gross weight (Kg)	48 / 52
Loading (40' HQ Units)	100
Voltage (V, Hz)	220-240V 50-60Hz

AF- 2700RFSS

Specifications

Total Capacity (Ltr)	270
Fridge Capacity (Ltr)	212
Freezer Capacity (Ltr)	58
No-frost	Multi Air flow
Energy Consumption	420 kWh/Year
With Ice maker	Electrical temperature control
Dimensions (mm)	1665 x 580 x 550
Net / Gross weight (Kg)	48 / 52
Loading (40' HQ Units)	100
Voltage (V, Hz)	220-240V 50-60Hz

AF-3400RFDS

Specifications

Total Capacity (Ltr)	340
Fridge Capacity (Ltr)	280
Freezer Capacity (Ltr)	60
Manual Defrost	38 dB noise level
Energy Consumption	514.65 kWh/Year
Dimensions (mm)	570 x 570 x 1730
Net / Gross weight (Kg)	34 / 36
Loading (40' HQ Units)	75
Voltage (V, Hz)	220-240V 50-60Hz

AF- 1700RFDS

Specifications

Total Capacity (Ltr)	170
Fridge Capacity (Ltr)	122
Freezer Capacity (Ltr)	48
Manual Defrost	38 dB noise level
Energy Consumption	346.75 kWh/Year
Dimensions (mm)	Electrical temperature control
Net / Gross weight (Kg)	192
Loading (40' HQ Units)	55 / 60
Voltage (V, Hz)	220-240V 50-60Hz



AF-4700RFT

Specifications

Total Capacity (Ltr)	47
Defroster	Chilling Compartment
Reversible doors	Separate Chilling Compartment
Temp control	Mechanical
Dimensions (mm)	450 x 470 x 500 mm
Net / Gross weight (Kg)	14.1 / 15.45
Loading (40'HQ Units)	585
Voltage (V, Hz)	220-240V 50-60Hz



AF-9300RFT

Specifications

Total Capacity (Ltr)	93
Fridge Capacity (Ltr)	83
Freezer Capacity (Ltr)	10
Temp control	Mechanical
Dimensions (mm)	450 x 455 x 845
Net / Gross weight (Kg)	20.96 / 22.79
Loading (40'HQ Units)	372
Voltage (V, Hz)	220-240V 50-60Hz



AF-2000CFWT

Specifications

Capacity (Ltr)	200
Type	Single door Chest Freezer
Feature	R600a Compressor
White color inside inner cabinet	Outside condenser
White color (door+cabinet)	With basket
Metal logo & LED light	Handle/lock
Dimensions (mm)	755 x 540 x 875
Net / Gross weight (Kg)	27 / 29
Loading (40'HQ Units)	198
Voltage (V, Hz)	220-240V 50-60Hz



AF-2600CFWT

Specifications

Capacity (Ltr)	260
Type	Single door Chest Freezer
Feature	R600a Compressor
White color inside inner cabinet	Outside condenser
White color (door+cabinet)	With basket
Metal logo & LED light	Handle/lock
Dimensions (mm)	1040 x 605 x 865
Net / Gross weight (Kg)	34 / 38
Loading (40'HQ Units)	123
Voltage (V, Hz)	220-240V 50-60Hz



AF-3500CFWT

Specifications

Capacity (Ltr)	350
Type	Single door Chest Freezer
Feature	R600a Compressor
White color inside inner cabinet	Outside condenser
White color (door+cabinet)	With basket
Metal logo & LED light	Handle/lock
Dimensions (mm)	1158 x 645 x 880
Net / Gross weight (Kg)	40 / 44
Loading (40'HQ Units)	108
Voltage (V, Hz)	220-240V 50-60Hz



AF-4500CFWT

Specifications

Capacity (Ltr)	450
Type	Double doors Chest Freezer
Feature	R600a Compressor
White color inside inner cabinet	Outside condenser
White color (door+cabinet)	With basket
Metal logo & LED light	Handle/lock
Dimensions (mm)	1403 x 769 x 867
Net / Gross weight (Kg)	58 / 68
Loading (40'HQ Units)	72
Voltage (V, Hz)	220-240V 50-60Hz



AF-5500CFWT

Specifications

Capacity (Ltr)	550
Type	Double doors Chest Freezer
Feature	R600a Compressor
White color inside inner cabinet	Outside condenser
White color (door+cabinet)	With basket
Metal logo & LED light	Handle/lock
Dimensions (mm)	1723 x 769 x 867
Net / Gross weight (Kg)	65 / 75
Loading (40'HQ Units)	60
Voltage (V, Hz)	220-240V 50-60Hz



AF-7000CFWT

Specifications

Capacity (Ltr)	700
Type	Double doors Chest Freezer
Feature	R600a Compressor
White color inside inner cabinet	Outside condenser
White color (door+cabinet)	With basket
Metal logo & LED light	Handle/lock
Dimensions (mm)	2030 x 725 x 910
Net / Gross weight (Kg)	84 / 94
Loading (40'HQ Units)	39
Voltage (V, Hz)	220-240V 50-60Hz



Front load Washing Machine Specifications

Model	AF-8140WMWT	AF-7120WMWT
Capacity (Kg)	8	7
Front loading washing machine	Efficient cleaning experience	Can take large loads
15 Integrated washing programs	LED display	Freestanding washing machine
Variety of options for efficient	Convenient washing	LED display
Child lock system disables controls	Saving power efficiently	Child lock system
Anti-foam control	Prevents tampering	Auto balance system
Auto balance system	Make washing easier, safer	Quick and clean wash
Motor speed	1200 rpm	1200 rpm
Net / Gross weight (Kg)	62 / 66	52 / 56
Voltage (V, Hz)	220-240V 50-60Hz	220-240V 50-60Hz



Top-load Washing Machine Specifications

Model	AF-1041WMWT	AF-8145WMWT
Capacity (Kg)	10	9
Top-loading Washing Machine	Automatic function	Automatic function
Multiple Washing Programs	Water pump	Water pump
Washing power 400W	Integrated LED display	Integrated LED display
Spinning power 350W	Child locked	Child locked
Motor speed 700 rpm	10 washing programs	10 washing programs
Transparent lid for easy loading	Drum Capacity 78L	Drum Capacity 66L
Dimensions (mm)	580 x 620 x 980	550 x 592 x 965
Net / Gross weight (Kg)	41 / 46	35.5 / 40.5
Voltage (V, Hz)	220-240V 50-60Hz	220-240V 50-60Hz



Top-load Washing Machine Specifications

Model	AF-6148WMWT
Capacity (Kg)	7
Top-loading Washing Machine	Automatic function
Multiple Washing Programs	without water pump
Washing power 400W	Integrated LED display
Spinning power 350W	Child locked
Motor speed 700 rpm	10 washing programs
Transparent lid for easy loading	Drum Capacity 55L
Dimensions (mm)	525 x 560 x 905
Net / Gross weight (Kg)	29 / 33
Voltage (V, Hz)	220-240V 50-60Hz

Twin-Tub Washing Machine Specifications

Model	AF-1500WMBK
Capacity (Kg)	15
Top-loading Washing Machine	Long-lasting for longer cleaning
Multiple Washing Programs	Freestanding washing machine
Washing power 400W	Washing machine and dryer
Spinning power 300W	Plastic housing
Motor speed 700 rpm	Tub material is durable
Transparent lid for easy loading	15 / 6.5
Dimensions (mm)	965 x 530 x 1090
Net / Gross weight (Kg)	114
Voltage (V, Hz)	220-240V 50-60Hz



ELECTRONICS

WASHING MACHINE



AF-1300WMGL

Specifications

Capacity (Kg)	13
Semi-automatic top loader	Long-lasting for longer cleaning
Quick, efficient washing experience	Freestanding washing machine
Twin tub design	Washing machine and dryer
Saving time and sparing hassle	Plastic housing
Provides optimum cleaning for all	Tub material is durable
Washing / Spin Capacity (kg)	13 / 6.5
Dimensions (mm)	925 x 545 x 1030
Loading (40'HQ Units)	118
Voltage (V, Hz)	220-240V 50-60Hz



AF-1061WMWB

Specifications

Capacity (Kg)	10
Semi-automatic top loader	Long-lasting for longer cleaning
Quick, efficient washing experience	Freestanding washing machine
Twin tub design	Washing machine and dryer
Saving time and sparing hassle	Plastic housing
Provides optimum cleaning for all	Tub material is durable
Washing / Spin Capacity (kg)	10 / 6.0
Dimensions (mm)	860 x 490 x 940
Loading (40'HQ Units)	143
Voltage (V, Hz)	220-240V 50-60Hz



AF-9000WMBL

Specifications

Capacity (Kg)	9.0
Semi-automatic top loader	Long-lasting for longer cleaning
Quick, efficient washing experience	Freestanding washing machine
Twin tub design	Washing machine and dryer
Saving time and sparing hassle	Plastic housing
Provides optimum cleaning for all	Tub material is durable
Washing/Spin Capacity (kg)	9.0 / 6.0
Dimensions (mm)	820 x 480 x 1000
Loading (40'HQ Units)	146
Voltage (V, Hz)	220-240V 50-60Hz



AF-7552WMWT

Specifications

Capacity (Kg)	7.5
Semi-automatic top loader	Long-lasting for longer cleaning
Quick, efficient washing experience	Freestanding washing machine
Twin tub design	Washing machine and dryer
Saving time and sparing hassle	Plastic housing
Provides optimum cleaning for all	Tub material is durable
Washing/Spin Capacity (kg)	7.5 / 6.0
Dimensions (mm)	760 x 430 x 885
Loading (40'HQ Units)	215
Voltage (V, Hz)	220-240V 50-60Hz

WASHING MACHINE

WASHING MACHINE

WASHING MACHINE

WASHING MACHINE



AF-7000WMBL

Specifications

Capacity (Kg)	7.0
Semi-automatic top loader	Long-lasting for longer cleaning
Quick, efficient washing experience	Freestanding washing machine
Twin tub design	Washing machine and dryer
Saving time and sparing hassle	Plastic housing
Provides optimum cleaning for all	Tub material is durable
Washing / Spin Capacity (kg)	7.0 / 3.0
Dimensions (mm)	720 x 430 x 890
Loading (40'HQ Units)	225
Voltage (V, Hz)	220-240V 50-60Hz

AF-6000WMBL

Specifications

Capacity (Kg)	6.0
Semi-automatic top loader	Long-lasting for longer cleaning
Quick, efficient washing experience	Freestanding washing machine
Twin tub design	Washing machine and dryer
Saving time and sparing hassle	Plastic housing
Provides optimum cleaning for all	Tub material is durable
Washing / Spin Capacity (kg)	6.0 / 3.3
Dimensions (mm)	660 x 400 x 830
Loading (40'HQ Units)	270
Voltage (V, Hz)	220-240V 50-60Hz

AF-3624BWTT

Specifications

Capacity (Kg)	3.6
Wash / Spin Power (W)	240 / 120
HQ powerful waterproof Motor	Anti rust body
Bottom non-slip foot pad	360° all-round care
Water flow conversion	
Package Meas (mm)	600 x 380 x 750
Dimensions (mm)	580 x 350 x 650
Loading (40'HQ Units)	435
Net / Gross weight (Kg)	11.0 / 12.0
Voltage (V, Hz)	220-240V 50-60Hz

AF-3024BWST

Specifications

Capacity (Kg)	3.0
Wash / Spin Power (W)	240 / 120
HQ powerful waterproof Motor	Anti rust body
Bottom non-slip foot pad	360° all-round care
Water flow conversion	Cute cat look
Package Meas (mm)	395 x 395 x 565
Dimensions (mm)	395 x 395 x 565
Loading (40'HQ Units)	830
Net / Gross weight (Kg)	6.0 / 5.0

ELECTRONICS

COOKING RANGE

COOKING RANGE



COOKING RANGE



COOKING RANGE



COOKING RANGE



AF-90SPSS

Specifications

Free Standing Electric	Ceramic Cooking Range
Total Electric power (W)	10968
Dimensions (cm)	90 x 60
Capacity (Ltr)	110
Closed Door Grilling	Stainless Steel
Grill Resistance	Mechanical timer 7 functions
Upper/Lower heating element	1200W/1700W
Includes removable oven racks	Storage compartment
Loading (40'/40'HQ Units)	166/189
Voltage (V, Hz)	AC 110-240V. 50/60Hz

AF-90

Specifications

Free Standing Cooking Range	5 Gas Burners
Total Electric power (W)	42
Dimensions (cm)	90 x 60
Capacity (Ltr)	110
Mechanical Timer	Large Capacity Oven
Double knob control	Rotisserie
Double Burner oven	Double Glass oven door
Full safety	Autoignition
Loading (40'/40'HQ Units)	166/189
Voltage (V, Hz)	AC 110-240V. 50/60Hz

AF-60VTSS

Specifications

Free Standing Electric	Ceramic Cooking Range
Total Electric power (W)	8441
Dimensions (cm)	60 x 60
Capacity (Ltr)	64
Upper/Lower heating element	1100W/1300W
Adjustable oven legs	Digital timer
Four infrared hotplates	2 Years Warranty
Includes removable oven racks	Storage compartment
Loading (40'/40'HQ Units)	172/228
Voltage (V, Hz)	AC 110-240V. 50/60Hz

AF-60

Free Standing Gas Oven	4 Gas Burners Cooking Range
Dimensions (cm)	60 x 60
Capacity (Ltr)	64
Mechanical Timer	Large Capacity Oven
Double knob control	Rotisserie
Double Burner oven	Double Glass oven door
Full safety	
	172/228



AF-6060CRHP

Specifications

Free Standing Oven	Hot Plate
Total Electric power (W)	7415
Dimensions (cm)	60 x 60
Capacity (Ltr)	64
Full Grey zebra knob	Kare handle aluminum
Thermostat for electrical oven	1tray+1 grid in the oven
Standard black color oven door glass	Double door oven glass
Upper/Lower heating element	1100W/1300W
Loading (40'/40'HQ Units)	172/228
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-6060CRHG

Specifications

Free Standing Oven	2 Gas + 2 Hot plate
Total Electric power (W)	4915
Dimensions (cm)	60 x 60
Capacity (Ltr)	64
Top panel stainless steel	Rest Inox painted
4 gas euro pool type burners	Full ignition for hob
Mechanical timer	Glass top Lid
1 tray+1 grid in the oven	Double door oven glass
Loading (40'/40'HQ Units)	172/228
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-5050CRHG

Specifications

Free Standing E-Cooking Range	2 Gas + 2 Hot plate
Dimensions (cm)	50 x 50
Capacity (Ltr)	42
2 gas EURO type burners	2 electric hotplate Standard
Metal cover	1 tray+1 grid in the oven
Single door oven glass	Fixed Drawer
Black color oven door glass	LPG adjusted
Standard black enamel cavity	Safety for hobs
Loading (40'/40'HQ Units)	276/312
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-5050CRGW

Specifications

Free Standing E-Cooking Range	4 Gas burners
Dimensions (cm)	50 x 50
Capacity (Ltr)	42
Full Safety on Hobs and oven parts	Black enameled top grids
Double burners in the oven	6 knobs
1 tray + 1 grid in the oven	Full compact body with white color
Double door oven glass	Protection plate
Standard black enamel cavity	LPG adjusted
Loading (40'/40'HQ Units)	276/312
Voltage (V, Hz)	AC 110-240V. 50/60Hz

ELECTRONICS

COOKING RANGE | MICROWAVE OVEN | ELECTRIC OVEN

COOKING RANGE



AF-5050CRGS

Specifications

Free Standing Oven	4 Gas burners
Total Electric power (W)	2x1500 and 2x1000
Dimensions (cm)	50 x 50
Capacity (Ltr)	42
4 Gas Euro pool burners	Black enameled top grids
Full Safety on Hobs and oven parts	Glass lid
Double burners in the oven	6 knobs
1 tray + 1 grid in the oven	Full compact body
Loading (40'/40'HQ Units)	276/312
Voltage (V, Hz)	AC 110-240V. 50/60Hz

MICROWAVE OVEN



AF-2070MWWT

Specifications

Microwave Oven	Digital Control
Total Power (W)	700
Capacity (Ltr)	20
Oven Grill, Quick Defrost Feature	10 Power Levels
Child safety lock	12 Auto cooking menu
Dimensions carton (mm)	478 x 358 x 288
Net / Gross weight (Kg)	9.88 / 10.81
Loading (20'/40'/40'HQ Units)	600/1250/1420
Voltage (V, Hz)	AC 110-240V. 50/60Hz

MICROWAVE OVEN



AF-2510MWBK

Specifications

Microwave Oven	Digital Control
Power Levels (W)	1000
Capacity (Ltr)	25
Multiple Power Levels	Compact Design
Oven Grill, Quick Defrost Feature	12 Auto cooking menu
Dimensions carton (mm)	556 x 408 x 322
Net / Gross weight (Kg)	13.15 / 14.55
Loading (20'/40'/40'HQ Units)	410/840/940
Voltage (V, Hz)	AC 110-240V. 50/60Hz

MICROWAVE OVEN



AF-3012MWSL

Specifications

Microwave Oven	Digital Control
Power Levels (W)	1200
Capacity (Ltr)	30
Oven Grill, Quick Defrost Feature	5 Power levels
Child safety lock	8 Auto cooking menu
Dimensions carton (mm)	582 x 442 x 335
Net / Gross weight (Kg)	15 / 16.5
Loading (20'/40'/40'HQ Units)	370/750/860
Voltage (V, Hz)	220-240V 50-60Hz



AF-1028OTBK

Specifications

Watts (W)	2800
Capacity (L)	100
4 Selection Knobs	Different cooking modes
Adjustable Thermostat 70 to 250 C	60 Minutes & Stay On Timer
Inside Light Cavity	7 Functions Control
Bake Tray, Wire Rack (KG)	Tray Handle, Rotisserie Set
Net / Gross weight (Kg)	17 / 18
Voltage (V, Hz)	AC 110-240V.%0/60Hz



AF-80220OTBK

Specifications

Watts (W)	2400
Capacity (L)	80
4 Selection Knobs	Different cooking modes
Adjustable Thermostat 70 to 250 C	60 Minutes & Stay On Timer
Inside Light Cavity	7 Functions Control
Bake Tray, Wire Rack (KG)	Tray Handle, Rotisserie Set
Net / Gross weight (Kg)	16 / 17
Voltage (V, Hz)	AC 110-240V.%0/60Hz



AF-5519OTBK

Specifications

Watts (W)	2100
Capacity (L)	55
4 Selection Knobs	Different cooking modes
Adjustable Thermostat 70 to 250 C	60 Minutes & Stay On Timer
Inside Light Cavity	7 Functions Control
Bake Tray, Wire Rack (KG)	Tray Handle, Rotisserie Set
Net / Gross weight (Kg)	11 / 12
Voltage (V, Hz)	AC 110-240V.%0/60Hz



AF-4517OTBK

Specifications

Watts (W)	1700
Capacity (L)	45
4 Selection Knobs	Different cooking modes
Adjustable Thermostat 70 to 250 C	60 Minutes & Stay On Timer
Inside Light Cavity	7 Functions Control
Bake Tray, Wire Rack (KG)	Tray Handle, Rotisserie Set
Net / Gross weight (Kg)	10 / 11
Voltage (V, Hz)	AC 110-240V.%0/60Hz

ELECTRIC OVEN

ELECTRIC OVEN

ELECTRIC OVEN

ELECTRIC OVEN

ELECTRONICS

ELECTRIC OVEN | PRESSURE COOKER | RICE COOKER



AF-3816OTBK

Specifications

Watts (W)	1600
Capacity (L)	38
4 Selection Knobs	Different cooking modes
Adjustable Thermostat 70 to 250 C	60 Minutes & Stay On Timer
Inside Light Cavity	7 Functions Control
Bake Tray, Wire Rack (KG)	Tray Handle, Rotisserie Set
Net / Gross weight (Kg)	9 / 18
Voltage (V, Hz)	AC 110-240V.%0/60Hz



AF-3015OTBK

Specifications

Watts (W)	1500
Capacity (L)	30
4 Selection Knobs	Different cooking modes
Adjustable Thermostat 70 to 250 C	60 Minutes & Stay On Timer
Inside Light Cavity	7 Functions Control
Bake Tray, Wire Rack (KG)	Tray Handle, Rotisserie Set
Net / Gross weight (Kg)	8 / 8.95
Voltage (V, Hz)	AC 110-240V.%0/60Hz



AF-1035PCSS

Specifications

Watts (W)	1400
Cooker Capacity (L)	10
Aluminum inner pot	900 HQ
Removable cooking insert	Multi Functional 17 Menu
Auto-cooking cycle	Automatic Pressure Control
Dimension	790 x 405 x 420 mm
Net / Gross weight (Kg)	15.1 / 19.1
Voltage (V, Hz)	AC 110-240V.%0/60Hz



AF-8035PCSS

Specifications

Watts (W)	1300
Cooker Capacity (L)	8
Aluminum inner pot	1150 HQ
Removable cooking insert	Multi Functional 17 Menu
Auto-cooking cycle	Automatic Pressure Control
Dimension	730 x 375 x 420 mm
Net / Gross weight (Kg)	12.4/ 15.1
Voltage (V, Hz)	AC 110-240V.%0/60Hz

ELECTRIC OVEN

ELECTRIC OVEN

PRESSURE COOKER

PRESSURE COOKER



AF-0630RCWT

Specifications

Capacity (Ltr)	0.6
Watts (W)	300
Package	4pcs / carton
Dimension (Gift Box HxWxD mm)	220 x 220 x 203
Dimension (Carton mm)	458 x 233 x 426
Net / Gross weight (Kg)	1.43 / 1.82
Loading (20'/40'HQ Units)	1880/4600
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-1040RCWT

Specifications

Capacity (Ltr)	1.0
Watts (W)	400
Package	4pcs / carton
Dimension (Gift Box HxWxD mm)	239 x 239 x 254
Dimension (Carton mm)	496 x 252 x 528
Net / Gross weight (Kg)	1.9 / 2.13
Loading (20'/40'HQ Units)	1580/3880
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-1550DRWT

Specifications

Capacity (Ltr)	1.5
Watts (W)	500
Package	4pcs / carton
Dimension (Gift Box HxWxD mm)	256 x 256 x 276
Dimension (Carton mm)	552 x 280 x 550
Net / Gross weight (Kg)	2.25 / 2.6
Loading (20'/40'HQ Units)	1728/4320
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-1550RCWT

Specifications

Capacity (Ltr)	1.5
Watts (W)	500
Package	4pcs / carton
Dimension (Gift Box HxWxD mm)	552 x 280 x 550
Dimension (Carton mm)	552 x 280 x 550
Net / Gross weight (Kg)	2.12 / 2.5
Loading (20'/40'HQ Units)	1300/3180
Voltage (V, Hz)	AC 110-240V. 50/60Hz

RICE COOKER

RICE COOKER

RICE COOKER

RICE COOKER

ELECTRONICS

RICE COOKER | AIR FRYER



AF-1870DRSS

Specifications

Capacity (Ltr)	1.8
Watts (W)	700
Package	4pcs / carton
Dimension (Gift Box HxWxD mm)	293 x 293 x 298
Dimension (Carton mm)	604 x 306 x 616
Net / Gross weight (Kg)	2.8 / 3.0
Loading (20'/40'HQ Units)	920/2432
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-2810RCMT

Specifications

Capacity (Ltr)	2.8
Watts (W)	1000
Package	4pcs / carton
Dimension (Gift Box HxWxD mm)	302 x 302 x 325
Dimension (Carton mm)	624 x 316 x 670
Net / Gross weight (Kg)	3.3 / 3.65
Loading (20'/40'HQ Units)	800/1960
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-56220RCGL

Specifications

Capacity (Ltr)	5.6
Watts (W)	2000
Package	1pcs / carton
Dimensions (Carton mm)	435x435x363
Net / Gross weight (Kg)	5.8 / 6.36
Loading (20'/40'HQ Units)	335/820
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-8025RCBK

Specifications

Capacity (Ltr)	8.0
Watts (W)	2500
Package	1pcs / carton
Dimensions (Carton mm)	480 x 480 x 365
Net / Gross weight (Kg)	5.8 / 6.36
Loading (20'/40'HQ Units)	275/364
Voltage (V, Hz)	AC 110-240V. 50/60Hz

RICE COOKER

RICE COOKER

RICE COOKER

RICE COOKER



AF-1517AFSS

Specifications

Capacity (Ltr)	15
Watts (W)	1700
Sensor touch control	360° Overall hot air circulation
Automatic power off	Digital LED Display -10 Menu
Dimensions (Carton mm)	470 x 425 x 475
Timer (mins)	0 - 60
Net / Gross weight (Kg)	9.5 / 11
Temperature adjustable	80° C - 200° C
Loading (20'/40'/40'HQ Units)	350/870/900
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-0813AFSS

Specifications

Capacity (Ltr)	8
Watts (W)	1300
Sensor touch control	360° Overall hot air circulation
Automatic power off	Digital LED Display -6 Menu
Dimensions (Carton mm)	397 x 397 x 389
Timer (mins)	0 - 60
Net / Gross weight (Kg)	3.8 / 4.2
Temperature adjustable	80° C - 200° C
Loading (20'/40'/40'HQ Units)	420/875/900
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-1218AFBK

Specifications

Capacity (Ltr)	12 , drip tray, removable racks
Watts (W)	1800
Display	Crystal-Clear XL
Sensor touch control	360° Overall hot air circulation
Automatic power off	Digital LED Display -12 Menu
Dimensions (Carton mm)	440 x 395 x 477 mm
Net / Gross weight (Kg)	8.5 / 9.5
Temperature adjustable	80° C - 200° C
Loading (40'/40'HQ Units)	745/825
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-5518AFSS

Specifications

Capacity (Ltr)	5.5 with frying basket
Watts (W)	1500
Display	Crystal-Clear XL
Sensor touch control	360° Overall hot air circulation
Automatic power off	Digital LED Display -12 Menu
Dimensions (Carton mm)	741 x 370 x 413
Net / Gross weight (Kg)	6.2 / 7.2
Temperature adjustable	80° C - 200° C
Loading (20'/40'/40'HQ Units)	500/1000/1180
Voltage (V, Hz)	AC 110-240V. 50/60Hz

AIR FRYER

AIR FRYER

AIR FRYER

AIR FRYER

ELECTRONICS

AIR FRYER | DEEP FRYER | BBQ GRILL | TOASTER



AF-2515AFBK

Specifications

Capacity (Ltr)	2.5, drip tray, removable racks
Watts (W)	1500
Rapid air circulation system	360° Overall hot air circulation
Automatic power off (min)	Timer up to 60
Dimensions (Carton mm)	625 x 320 x 371
Net / Gross weight (Kg)	3.8 / 4.3
Temperature adjustable	80° C - 200° C
Loading (20'/40'/40'HQ Units)	820/1698/1928
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-2000DFSS

Specifications

Capacity (Ltr)	3, drip tray, removable racks
Watts (W)	2000
Box Dimension (min)	515 x 440 x 450
Temperature control by thermostat	Adjustable Timer
Variable temperature:150-190C	Brushed Stainless steel housing
Non-stick coated, fixed oil receptacle	Removable lid, large window, filter
Power Cable: 2x0.75mm²x1.0m	Cool-touch handle
Net / Gross weight (Kg)	3.25 / 3.5
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-2000BGBK

Specifications

Rated Input Power (W)	2000
On/off indicator light	Auto-thermostat
Adjustable temperature control	With micro-switch, automatically
Portable and smoke -free	Metal tray with powder coating
Ideal for indoor and outdoor use	BBQ wire mesh
Dimensions (mm)	520 x 75 x 340
Net / Gross weight (Kg)	2 / 2.2
Loading (20'/40'/40'HQ Units)	4700/3980/1950
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-1600QBK

Specifications

Rated Input Power (W)	1600
Unit Size (mm)	469.6 x 304.9 x 172
Plate Size (mm)	L 406 x W 252
Cooking Plate	Fixed grill plate
Cooking Plate Temp	90-220°C
Reheat Time	360-420s
Thermostat Control	Anti-slip feet
Net / Gross weight (Kg)	5.125 / 5.75
Loading (20'/40'/40'HQ Units)	1460/3012/3300
Voltage (V, Hz)	220-240V 50-60Hz

AIR FRYER

DEEP FRYER

BBQ GRILL

BBQ GRILL



AF-24700TOBL

Specifications

Power (W)	1600
Body type	Matt Body
Bread Size (mm)	120 x 120
Functions	7-Setting Browning Control
4 Slice	Cancel indicator
Defrost indicator	Reheat indicator
Net / Gross weight (Kg)	3.88 / 4.2
Loading (20'/40'/40'HQ Units)	2392/2176/1024
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-100240TOWH

Specifications

Power (W)	700
Body type	Polished Plastic Body
Bread Size (mm)	100 x 100
2 Slice	Cancel indicator
Net / Gross weight (Kg)	1.0 / 1.2
Loading (20'/40'/40'HQ Units)	2808/5682/6180
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-100700TOBL

Specifications

Power (W)	700
Body type	Polished Plastic Body
Bread Size (mm)	100 x 100
2 Slice	Cancel indicator
Net / Gross weight (Kg)	1.0 / 1.2
Loading (20'/40'/40'HQ Units)	1672/3376/3800
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-120900TOSS

Power (W)	700
Body type	Polished Plastic Body + (SUS)
Bread Size (mm)	120 x 120
2 Slice	Cancel indicator
Defrost indicator	Reheat indicator
	1.37 / 1.57
	1672/3376/3800

TOASTER

TOASTER

TOASTER

TOASTER



AF-20700TOSS

Specifications

Power (W)	700
Unit Size (mm)	270 x 230 x 90
Plate Size (mm)	236 x 125
Housing	Plastic with stainless steel
Cooking Plate Temp	200 +/- 20 C
Dimensions (mm)	270 x 230 x 90
Net / Gross weight (Kg)	1.2 / 1.5
Loading (20'/40'/40'HQ Units)	3300/3012/1460
Voltage (V, Hz)	AC 220-240V. 50/60Hz

SANDWICH MAKER



AF-8020SMBK

Specifications

Power (W)	750
Plate Size (mm)	215*125mm
Cool touch handle	Anti-slip Rubber feet
Variable temperature control	Power on&Ready indicator lights
Power cord and length (m)	3 x 0.75m ² , 0.75
Dimensions (mm)	243 x 100 x 240
Net / Gross weight (Kg)	12 / 13.8
Loading (20'/40'/40'HQ Units)	4100/8520/10000
Voltage (V, Hz)	AC 220-240V. 50/60Hz

SANDWICH MAKER



AF-8023SMSS

Specifications

Power (W)	750
Plate Size (mm)	215*125mm
Automatic temperature control	Power & Ready light indicators
Non stick coating for easy cleaning	Slice with fixed plate
Power cord and length (m)	3 x 0.75 m ² , 0.7
Dimensions (mm)	280 x 150 x 267
Net / Gross weight (Kg)	8.9 / 11.5
Loading (20'/40'/40'HQ Units)	2320/4820/8490
Voltage (V, Hz)	AC 220-240V. 50/60Hz

SANDWICH MAKER



AF-1840CGSS

Specifications

Power (W)	2000
Plate Size (mm)	290*230mm
Removable Non-stick cooking plates	Dishwasher safe
Floating hinge for grilling	Opens flat to 'BBQ Mode
Power cord and length (m)	3 x 0.75 m ² x 0.75
Dimensions (mm)	340*150*350
Net / Gross weight (Kg)	13.2/14
Loading (20'/40'/40'HQ Units)	980 / 2000 / 2400
Voltage (V, Hz)	AC 110-240V. 50/60Hz

SANDWICH MAKER



AF-7520PMSS

Specifications

Power (W)	750
Plate Size (mm)	230 x 145
Floating hinge for grilling	Opens flat to 'BBQ Mode'
Power cord and length (m)	3 x 0.75 m ² x 0.75
Dimensions (mm)	285 x 100 x 250
Net / Gross weight (Kg)	12.5/13.5
Loading (20'/40'/40'HQ Units)	3360/6720/8400
Voltage (V, Hz)	AC 220-240V. 50/60Hz



AF-800JCBK

Specifications

Watts (W)	800
Capacity (Ltr)	2.4 Extra-large pulp
Transparent lid and non-slip feet	Stainless steel filter
2 speeds control sections	450ml juice cup
Multifunction includes juicer	1.5L glass blender
Stainless steel filter	Grinder jar. 1.2L pulp
Dimensions Carton (mm)	569 x 453 x 816
Loading (20'/40'/40'HQ Units)	576/1152/1312
Net / Gross weight (Kg)	7.25 / 7.5
Voltage (V, Hz)	220-240V 50-60Hz



AF-400JCBK

Specifications

Watts (W)	400
Capacity (Ltr)	1.0 glass blender
Transparent lid and non-slip feet	Stainless steel filter
2 speeds control sections	450ml juice cup
Multifunction includes juicer	1.5L glass blender
Stainless steel filter	Grinder jar. 1.2L pulp
Dimensions Carton (mm)	825 x 435 x 336
Loading (20'/40'/40'HQ Units)	1440/2940/2940
Net / Gross weight (Kg)	2.33 / 2.5
Voltage (V, Hz)	220-240V 50-60Hz



AF-0700JCSS

Specifications

Watts (W)	700
Capacity (Ltr)	2
Transparent lid and non-slip feet	Stainless steel filter
2 speeds control sections	900ml juice cup
Function	Multifunction includes juicer
Dimensions Carton (mm)	533 x 360 x 415
Loading (20'/40'/40'HQ Units)	1400 / 1700
Net / Gross weight (Kg)	4.1 / 4.4
Voltage (V, Hz)	220-240V 50-60Hz

ELECTRONICS

MIXER GRINDER | BLENDER

MIXER GRINDER



AF-7500BLBK

Specifications

Watts (W)	750
Motor speed 18000 RPM	Unbreakable ABS Body
Safety Interlock	High-Quality SS Blade
3 Stainless Steel Jars	Liquidizer Jar 1.5 L
Chutney Jar 400ml	Grinder Jar 1.0 L
Dimensions Carton (mm)	394 x 235 x 268
Net / Gross weight (Kg)	4.75 / 5.3
Loading (40'HQ Units)	2500
Voltage (V, Hz)	AC 110-240V. 50/60Hz

MIXER GRINDER



AF-7500BLWH

Specifications

Watts (W)	750
Motor speed 18000 RPM	Unbreakable ABS Body
3 Speed Control	High-Quality SS Blade
Chutney Jar 400ml	3 Stainless Steel Jars
Grinder Jar 1.0 L	Liquidizer Jar 1.5 L
Dimensions Carton (mm)	394 x 235 x 268
Net / Gross weight (Kg)	1.85 / 2.05
Loading (40'HQ Units)	2500
Voltage (V, Hz)	AC 110-240V. 50/60Hz

MIXER GRINDER



AF-5500BLRD

Specifications

Watts (W)	550
Motor speed 18000 RPM	Unbreakable ABS Body
High-Quality Stainless Steel Blade	Food Grade Rubber Gasket
Liquidizer Jar 1.5 L	Grinder Jar 1.0 L
Chutney Jar 400ml	Safety Interlock
Dimensions Carton (mm)	394 x 235 x 268
Net / Gross weight (Kg)	3.3 / 3.6
Loading (40'HQ Units)	2500
Voltage (V, Hz)	AC 110-240V. 50/60Hz

2IN1 BLENDER 1.5L



AF-600BLBK

Specifications

Watts (W)	600
Jar Type	Plastic Jug With 1.5L Capacity
4 Blades for Ice crushing	Plastic Blender Jar
Safety Interlock	Overheat protector on motor
2 Speed Control With Pulse	For fruit/vegetable blending
Dimensions Carton (mm)	210 x 210 x 405
Net / Gross weight (Kg)	2.4 / 2.6
Loading (20'/40'/40'HQ Units)	1470/3024/3360
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-610BLSL

Specifications

Watts (W)	600
Jar Type	Glass Jug With 1.8L Capacity
6 blades for ice crushing	Glass Blender Jar
Safety Interlock	Overheat protector on motor
2 Speed Control With Pulse	For fruit/vegetable blending
Dimensions Carton (mm)	210 x 210 x 445
Net / Gross weight (Kg)	3.83 / 4.0
Loading (20'/40'/40'HQ Units)	1365/2730/3508
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-500BLWT

Specifications

Watts (W)	500
Jar Type	Plastic Jug With 1.5L Capacity
Safety Interlock	SS Blade
2 Speed Control With Pulse	2 in 1
Dimensions Carton (mm)	200 x 175 x 375
Net / Gross weight (Kg)	2 / 2.3
Loading (20'/40'/40'HQ Units)	1940/3920/4520
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-0400BLWT

Specifications

Watts (W)	400
Jar Type	Materials: Plastic housing
3 in 1 stand blender	7025 copper motor with EMC
Micro safety switch	S/S 6 Blades and filter
Jars Capacity (ml)	1500/450/250
Dimensions Carton (mm)	365 x 160 x 255
Net / Gross weight (Kg)	1.85 / 2.05
Loading (20'/40'/40'HQ Units)	1888/3840/4280
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-450BLGN

Specifications

Watts (W)	450
Jar Type	Materials: Plastic housing
3 in 1 stand blender	7025 copper motor with EMC
Micro safety switch	S/S 6 Blades and filter
Jars Capacity (ml)	1500/450/250
Dimensions Carton (mm)	365 x 199 x 313
Net / Gross weight (Kg)	1.85 / 2.05
Loading (20'/40'/40'HQ Units)	1888/3840/4280
Voltage (V, Hz)	AC 110-240V. 50/60Hz

2IN1 BLENDER

2IN1 BLENDER

3IN1 BLENDER

2IN1 BLENDER



AF-0600BISS

Specifications

Watts (W)	600
2 Speed Control With Pulse	Glass Jug With 1.5L Capacity
6 blades	Unique detachable parts
Safety Interlock	Overheat protector on motor
For fruit/vegetable blending	Mixing Cup
Dimensions Carton (mm)	240 x 136 x 245
Net / Gross weight (Kg)	1.2 / 1.5
Loading (20'/40'/40'HQ Units)	3189/6540/7290
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-162PBBK

Specifications

Rated Input Power (W)	1600
Motor	100% Copper Motor
Protection	Overload Protection
Speed	9 + speed levels
Capacity	2000ml PC unbreakable jar
Dimensions carton (mm)	360 x 250 x 250 mm
Net / Gross weight (Kg)	4 / 4.8
Loading (20'/40'/40'HQ Units)	370/750/860
Voltage (V, Hz)	220-240V 50-60Hz



AF-1550BLWT

Specifications

Watts (W)	400
Jar Type	Materials: Plastic housing
Stainless steel blades	7025 copper motor with EMC
Micro safety switch	S/S 6 Blades and filter
Jar Capacity (ml)	1500
Dimensions Carton (mm)	200 x 180 x 390
Net / Gross weight (Kg)	2.65 / 2
Loading (20'/40'/40'HQ Units)	1940/3920/4520
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-425CHSS

Specifications

Power (W)	400
Capacity (Ltr)	2.5
2 Level Adjustable Speed	With egg beater
4 SUS Blades	Food grade 4 PCS Long life
Dimensions (mm)	185 x 185 x 250 mm
Net / Gross weight (Kg)	1.2 / 1.4
Loading (20'/40'/40'HQ Units)	4700/3980/1950
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-400CHSS

Specifications

Watts (W)	400
Capacity (Ltr)	2
Material	Plastic housing
Blades	Four stainless Steel
Suitable for kitchen use	Compact Design
Inspired by Japanese design	Perfect for slicing
Dimensions Carton (mm)	345 x 227 x 209 mm
Loading (20'/40'/40'HQ Units)	1572/3192/3738
Net / Gross weight (Kg)	2.8 / 3
Voltage (V, Hz)	220-240V 50-60Hz



AF-0500SBBK

Specifications

Watts (W)	500
Stainless steel body	With plastic handle
6 speed settings and turbo	Ejector button with safety
Level 1 with low speed	Starting (around 550 RPM)
Box Dimension (mm)	206 x 100 x 200
Dimensions Carton (mm)	318 x 216 x 416
Net / Gross weight (Kg)	3.33 / 3.52
Loading (20'/40'/40'HQ Units)	5100/10590/12708
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-1240BLSSET

Specifications

Watts (W)	1200
Body	Plastic and sus housing
Stick Blender	Stainless steel
Accessories	Chopper, whisk, measuring cup
Safety Interlock	Micro safety switch
450ml Chopping cup	250ml Grinding cup
Dimensions Carton (mm)	240 x 136 x 245
Net / Gross weight (Kg)	1.4/ 1.7
Loading (20'/40'/40'HQ Units)	10544/21656/24128
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-14600BLCR

Specifications

Watts (W)	600
2 Speed Control With Pulse	Plastic Jug With 1.8L Capacity
6 blades	Unique detachable parts
Safety Interlock	Overheat protector on motor
For fruit/vegetable blending	Mixing Cup
Dimensions Carton (mm)	240 x 136 x 245
Net / Gross weight (Kg)	1.2 / 1.5
Loading (20'/40'/40'HQ Units)	3189/6540/7290
Voltage (V, Hz)	AC 110-240V. 50/60Hz

ELECTRONICS

COFFEE MAKER | COFFEE GRINDER | HAND MIXER | MEAT GRINDER



AF-15900CMKSS

Specifications

Watts (W)	900
Capacity (Ltr)	1.5
Features	Removable filter holder
Water level indicator	Anti-drip system
Lighted on/off switch	Automatic shut off
Removable Funnel	Anti-Drip
Dimensions Carton (mm)	184 x 274 x 351
Loading (20'/40'/40'HQ Units)	952/2062/2280
Net / Gross weight (Kg)	1.3 / 1.5
Voltage (V, Hz)	220-240V 50-60Hz



AF-15750CMKBL

Specifications

Watts (W)	750
Capacity (Ltr)	1.5
Features	Removable filter holder
Water level indicator	Anti-drip system
Lighted on/off switch	Automatic shut off
Removable Filter	Anti-Drip
Dimensions Carton (mm)	250 x 175 x 330
Loading (20'/40'/40'HQ Units)	1152/2352/2608
Net / Gross weight (Kg)	1.3 / 1.5
Voltage (V, Hz)	220-240V 50-60Hz



AF-6150CGRBL

Specifications

Watts (W)	150
Capacity (gram)	60
Black Finish	Transparent Cover
Stainless Steel Bowl	Stainless Steel Blades
Dimensions Carton (mm)	88.4 x 96.3 x 172.6
Loading (20'/40'/40'HQ Units)	9600/20000/22000
Net / Gross weight (Kg)	0.6 / 0.8
Voltage (V, Hz)	220-240V 50-60Hz



AF-1200SMBK

Specifications

Max power (W)	1200
7635 Motor with Hall electric plate	6 speeds with 1 turbo mode
Material ABS body (metal trim strip)	5L Stainless Steel Bowl
Dough Hook / Flat beater / Whip	Non-slip rubber feet
Dimensions Carton (mm)	410 x 265 x 335
Net / Gross weight (Kg)	4.5 / 5.5
Loading (20'/40'/40'HQ Units)	580/1160/1270
Voltage (V, Hz)	AC 110-240V. 50/60Hz

COFFEE MAKER

COFFEE MAKER

COFFEE GRINDER

STAND MIXER



AF-1406HMXSS

Specifications

Watts (W)	300
Stainless steel body	With plastic handle
6 speed settings and turbo	Ejector button with safety
Level 1 with low speed	Starting (around 550 RPM)
Box Dimension (mm)	206 x 100 x 200
Dimensions Carton (mm)	318 x 216 x 416
Net / Gross weight (Kg)	3.33 / 3.52
Loading (20'/40'/40'HQ Units)	5100/10590/12708
Voltage (V, Hz)	AC 110-240V. 50/60Hz

HAND MIXER

HAND MIXER

MEAT GRINDER

MEAT GRINDER



AF-250HMWT

Specifications

Watts (W)	250
Plastic housing is durable	With beaters and dough hooks
5 speed settings and turbo	Ejector button with safety
Box Dimension (mm)	200 x 96 x 164
Dimensions Carton (mm)	96 x 200 x 146
Net / Gross weight (Kg)	1.1 / 1.2
Loading (20'/40'/40'HQ Units)	7584/15720/18432
Voltage (V, Hz)	AC 110-240V. 50/60Hz

AF-1800MGBK

Specifications

Rated power / Max power (W)	1800
7635 copper Motor	Speed on-off & reverse function
Material ABS housing	Detachable parts easy to clean
Aluminum grinder head and tray	Non-slipping rubber feet
3 cutting discs	Sausage and kubbe attachment
Over heat protection	2x0.75mm ² power cord
Dimensions Carton (mm)	425 x 205 x 265
Net weight /Gross weight	3.7 / 4.2
Loading (20'/40'/40'HQ Units)	1092/2262/2658
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-1200MGWT

Specifications

Rated power / Max power (W)	1200
7635 copper Motor	Speed on-off & reverse function
Material ABS housing	Detachable parts easy to clean
Aluminum grinder head and tray	Non-slipping rubber feet
3 cutting discs	Sausage and kubbe attachment
Over heat protection	2x0.75mm ² power cord
Dimensions Carton (mm)	425 x 195 x 255
Net / Gross weight (Kg)	3 / 3.5
Loading (20'/40'/40'HQ Units)	1183/2450/2873
Voltage (V, Hz)	AC 110-240V. 50/60Hz



ELECTRONICS

CITRUS JUICER | ELECTRIC KETTLE

CITRUS JUICER

CITRUS JUICER



AF-0180CJSS

Specifications

Rated Input Power (W)	180
Motor	100% Copper Motor
Capacity	500ml
Dimensions carton (mm)	495 x 405 x 615mm
Net / Gross weight (Kg)	1.53 / 1.66
Loading (20'/40'/40'HQ Units)	1800 x 3720 x 4400
Voltage (V, Hz)	220-240V 50-60Hz



AF-0600BISS

Specifications

Watts (W)	30
Capacity (L)	1
Function	dual direction rotation
Dimensions Carton (mm)	590 x 398 x 510mm
Net / Gross weight (Kg)	1.2 / 1.8
Loading (20'/40'/40'HQ Units)	2760 / 5760 / 6780
Voltage (V, Hz)	AC 220-240V. 50/60Hz





AF-1815KTSS

Specifications

Watts (W)	1500
Capacity (Ltr)	1.8
Type	Stainless Steel
Fast heating ,Auto shut-off function	Over heat protection
Drip-free spout makes pouring easy	Heating plate - fast water boil.
Automatic cut-off when water boils	360° cordless electric jug
Dimensions Carton (mm)	203 x 165 x 230
Loading (20'/40'/40'HQ Units)	3336/6804/8040
Net / Gross weight (Kg)	0.76 / 1.0
Voltage (V, Hz)	220-240V 50-60Hz



AF-1820KTGL

Specifications

Watts (W)	1500
Capacity (Ltr)	1.8
Type	Glass body
Fast heating ,Auto shut-off function	Over heat protection
Drip-free spout makes pouring easy	LED Light Indicator
Heating plate - fast water boil.	360° cordless electric jug
Dimensions Carton (mm)	197 x 197 x 265
Loading (20'/40'/40'HQ Units)	2472/5220/6120
Net / Gross weight (Kg)	1.0 / 1.1
Voltage (V, Hz)	220-240V 50-60Hz



AF-171850KTGS

Specifications

Watts (W)	2200
Capacity (Ltr)	1.7
Type	Glass body
Fast heating ,Auto shut-off function	Over heat protection
Drip-free spout makes pouring easy	Heating plate - fast water boil.
Automatic cut-off when water boils	360° cordless electric jug
Dimensions Carton (mm)	215 x 175 x 223
Loading (20'/40'/40'HQ Units)	1728/3720/4488
Net / Gross weight (Kg)	1 / 1.1
Voltage (V, Hz)	220-240V 50-60Hz



AF-201850KTBL

Specifications

Watts (W)	2200
Capacity (Ltr)	1.7
Type	ABS Plastic body
Fast heating ,Auto shut-off function	Over heat protection
Heating plate - fast water boil.	Adjusted Temperature control
Automatic cut-off when water boils	360° cordless electric jug
Dimensions Carton (mm)	225 x 155 x 223
Loading (20'/40'/40'HQ Units)	3336/6912/7741
Net / Gross weight (Kg)	0.75 / 0.95
Voltage (V, Hz)	220-240V 50-60Hz

KETTLE

KETTLE

KETTLE

KETTLE

ELECTRONICS

ELECTRIC KETTLE | INFRARED COOKER



AF-401850KTSS

Specifications

Watts (W)	2200
Capacity (Ltr)	1.7
Type	Stainless Steel, Glass
Fast heating ,Auto shut-off function	Over heat protection
Drip-free spout makes pouring easy	Strix control ensures safety
Automatic cut-off when water boils	360° cordless electric jug
Dimensions Carton (mm)	217 x 155 x 230
Loading (20'/40'/40'HQ Units)	2316/4860/5400
Net / Gross weight (Kg)	1 / 1.1
Voltage (V, Hz)	220-240V 50-60Hz



AF-1015KTSS

Specifications

Watts (W)	1500
Capacity (Ltr)	1
Features	Rapid Heating
Water level indicator	Inside
Lighted on/off switch	Automatic shut off
Dimensions Carton (mm)	555 x 365 x 410mm
Loading qty	4020 / 8280 / 9720
Net / Gross weight (Kg)	0.8 / 0.84
Voltage (V, Hz)	220-240V 50-60Hz



AF-1215KTBK

Specifications

Watts (W)	1500
Capacity (Ltr)	1.2
Features	Rapid Heating
Water level indicator	Inside
Lighted on/off switch	Automatic shut off
Dimensions Carton (mm)	555 x 365 x 450mm
Loading qty	3660 / 7560 / 8880
Net / Gross weight (Kg)	0.9 / 0.96
Voltage (V, Hz)	220-240V 50-60Hz



AF-0511KTSS

Specifications

Watts (W)	1100
Capacity (Ltr)	0.5
Features	Rapid Heating
Water level indicator	Inside
Lighted on/off switch	Automatic shut off
Dimensions Carton (mm)	513 x 235 x 380mm
Loading qty	7680 x 15840 x 18600mm
Net / Gross weight (Kg)	1.3 / 1.5
Voltage (V, Hz)	220-240V 50-60Hz

KETTLE

KETTLE

KETTLE

KETTLE



AF-3000ICBK

Specifications

Total Power (W)	3000
Knob and touch control	Child lock
4 digital led display	10 power/temperature levels
H.Q y black polished crystal plate	3 Hours timer
H / L heating or voltage protection	Suitable for any materials pot
Multifunction Pizza, milk/tea	BBQ, fry, water
Dimensions (Carton mm)	720 x 270 x 520
Net / Gross weight (Kg)	5.65 / 7.0
Loading (20'/40'/40'HQ Units)	600/1180/1310
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-2000ICBK

Specifications

Power (W)	2000
Multi-function	BBQ, Stir-Fry, Hot Pot Settings
4 digital led display	10 power/temperature levels
H.Q y black polished crystal plate	3 Hours timer
H / L heating or voltage protection	Suitable for any materials pot
Dimensions (Carton mm)	570 x 345 x 470 mm
Net weight /Gross weight	2.5 / 3KG
Loading (20'/40'/40'HQ Units)	1944/3990/4500
Voltage (V, Hz)	AC 110-240V. 50/60Hz Class I



AF-2000BICBK

Specifications

Power (W)	2000
Multi-function	BBQ, Stir-Fry, Hot Pot Settings
4 digital led display	10 power/temperature levels
H.Q y black polished crystal plate	3 Hours timer
H / L heating or voltage protection	Suitable for any materials pot
Dimensions (Carton mm)	570 x 345 x 47
Net weight /Gross weight	2.5 / 3KG
Loading (20'/40'/40'HQ Units)	1944/3990/4500
Voltage (V, Hz)	AC 110-240V. 50/60Hz Class I



AF-2500HPSS

Specifications

Total Power (W)	2500
HQ cast iron heating element	High quality Ceramic painting
Thermostatic control	Adjustable temperature settings
Thermal fuses for overheating	Safety protection
Durable rubber power cord	Stainless steel housing;
Cast iron plates dimensions (mm)	187 + 164
Dimensions (mm)	490 x 88 x 285 mm
Net / Gross weight (Kg)	2.5 / 2.8
Loading (20'/40'/40'HQ Units)	2035/4200/4900
Voltage (V, Hz)	AC 110-240V. 50/60Hz

INFRARED COOKER

INFRARED COOKER

INFRARED COOKER

DOUBLE HOT PLATE



HOT PLATE

AF-1500HPSS

Specifications

Total Power (W)	1500
HQ cast iron heating element	High quality Ceramic painting
Thermostatic control	Adjustable temperature settings
Thermal fuses for overheating	Safety protection
Durable rubber power cord	Stainless steel housing;
Cast iron plates dimensions (mm)	177
Dimensions (mm)	250 x 88 x 285
Net / Gross weight (Kg)	1.35 / 1.5
Loading (20'/40'/40'HQ Units)	3960/8100/9510
Voltage (V, Hz)	AC 110-240V. 50/60Hz



GAS STOVE

AF-0003GSSS

Specifications

Stainless Steel Gas Stove	Three Indian Brass Burner FFD
Body material: Stainless Steel	For LPG 28-30 mbar
Size: 710x370mm, 0.4mm thickness	Burners Size: 70x40x90mm
Auto Piezo Electric Ignition	Size: 720 x 375 x 120
FFD (Flame Failure Safety Device)	Round Tray Dip
Enameled Steel Pan Support	Suitable for kitchen use
Dimensions (Carton mm)	750 x 420 x 120
Net / Gross weight (Kg)	4.45 / 5.3
Loading (40'HQ Units)	1700



GAS STOVE

AF-0002GSSS

Specifications

Stainless Steel Gas Stove	Double Indian Brass Burner FFD
Stainless Steel body	Thickness 0.4 mm
Auto Piezo Electric Ignition	Round Plastic Knobm
FFD (Flame Failure Safety Device)	For LPG 28-30 mbar
Dimensions (Carton mm)	720 x 395 x 100
Net / Gross weight (Kg)	3 / 3.7
Loading (40'HQ Units)	2500



GAS STOVE

AF-0001GSSS

Specifications

Gas Stove	Single Indian Brass Burner FFD
Tempered Glass top	720x375mm, 7mm thickness
1 Brass Indian Burner Cap	Burners Size: 70 x 40 x 90 mm
Stainless Steel frame and DipTray	Cast Iron Mixing Tube
Auto Piezo Electric Ignition	For LPG 28-30 mbar
Dimensions (mm)	280 x 375
Net / Gross weight (Kg)	6.3 / 7.2
Loading (20'/40'HQ Units)	2500/6000



AF-0003GSBK

Specifications

Glass Gas Stove	Three Brass Burner FFD
Tempered Glass top	720x375mm, 7mm thickness
3 Brass Indian Burner Cap	Burners Size: 70x40x90mm
Stainless Steel frame and DipTray	Cast Iron Mixing Tube
Auto Piezo Electric Ignition	720x375x120mm
FFD (Flame Failure Safety Device)	English & Arabic Manual
Enameled Pan Support	For LPG 28-30 mbar
Dimensions (mm)	723 x 378
Net / Gross weight (Kg)	7.85 / 8.4
Loading (40'HQ Units)	1950



AF-0002GSBK

Specifications

Gas Stove	Two Indian Burner FFD
Tempered Glass top	720x375 mm, 7 mm thickness
2 Brass Indian Burner Cap	Burners Size: 70x40x90 mm
Stainless Steel frame and DipTray	Cast Iron Mixing Tube
Auto Piezo Electric Ignition	For LPG 28-30 mbar
Dimensions (mm)	723 x 378
Net / Gross weight (Kg)	6.3 / 7.2
Loading (40'HQ Units)	1950



AF-1216IMBK

Specifications

Rated Input Power (W)	120
Bullet Ice Maker	12 Kg
Capacity (Ltr)	1.6 water tank
Time	9 pcs ice per cycle in 9 mins
Product Size (mm)	L308 x W224 x H283
Dimensions (Carton mm)	354 x 270 x 335
Net / Gross weight (Kg)	7.8 / 8.8
Loading (40'HQ Units)	2300
Voltage (V, Hz)	AC 110-240V. 50/60Hz



AF-1521IMSL

Specifications

Rated Input Power (W)	120
Bullet Ice Maker	15 Kg
Capacity (Ltr)	2.1 water tank
Time	10 pcs ice per cycle in 8 mins
Product Size (mm)	L308 x W224 x H283
Dimensions (Carton mm)	450 x 325 x 382
Net / Gross weight (Kg)	9.4 / 11.3
Loading (40'HQ Units)	1300
Voltage (V, Hz)	AC 110-240V. 50/60Hz

ELECTRONICS

WATER DISPENSER | GARMENT STEAMER

WATER DISPENSER



AF-9630WDBK

Specifications

Water Bottom loading	Auto Thermostat Technology
Total power (W)	640
550 W Heating + 90 W Cooling	Fast Cooling 2L /Hr Cold Water
Over-Current Protection	Hot ,Cold and Normal Function
High efficiency Compressor	3 Tap
Dimensions (mm)	325 x 335 x 1000
Net / Gross weight (Kg)	13 / 14
Loading (20"/40'HQ Units)	640/260
Voltage (V, Hz)	220-240V 50-60Hz

WATER DISPENSER



AF-9830WDWH

Specifications

Bottom Refrigerator	Auto Thermostat Technology
Total power (W)	660
550 W Heating + 110 W Cooling	Fast Cooling 2L /Hr Cold Water
Over-Current Protection	Hot ,Cold and Normal Function
High efficiency Compressor	3 Tap
Dimensions (mm)	315 x 315 x 1000
Net / Gross weight (Kg)	14 / 15
Loading (20"/40'HQ Units)	280/680
Voltage (V, Hz)	220-240V 50-60Hz

WATER DISPENSER



AF-95WDWT

Specifications

Water dispenser Cabinet	Auto Thermostat Technology
Total power (W)	630
550 W Heating + 80 W Cooling	Fast Cooling 2L /Hr Cold Water
Over-Current Protection	Hot and Cold
High efficiency Compressor	2 Tap
Dimensions (mm)	310 x 320 x 975
Net / Gross weight (Kg)	15 / 16.5
Loading (20"/40'HQ Units)	384/450
Voltage (V, Hz)	220-240V 50-60Hz

WATER DISPENSER



AF-85WDWT

Specifications

Water dispenser Cabinet	Auto Thermostat Technology
Total power (W)	630
550 W Heating + 80 W Cooling	Fast Cooling 2L /Hr Cold Water
Over-Current Protection	Hot and Cold
High efficiency Compressor	2 Tap
Dimensions (mm)	270 x 300 x 850
Net / Gross weight (Kg)	11 / 11.75
Loading (40"/40'HQ Units)	680/864
Voltage (V, Hz)	220-240V 50-60Hz



AF-9820WDGD

Specifications

Bottom Cabinet	Auto Thermostat Technology
Total power (W)	640
550 W Heating + 90 W Cooling	Fast Cooling 2L /Hr Cold Water
Over-Current Protection	Hot ,Cold and Normal Function
High efficiency Compressor	2 Tap
Dimensions (mm)	315 x 315 x 1000
Net / Gross weight (Kg)	13 / 14
Loading (20"/40'HQ Units)	280/680
Voltage (V, Hz)	220-240V 50-60Hz

WATER DISPENSER



AF-5030WDWH

Specifications

Water dispenser	Auto Thermostat Technology
Total power (W)	640
550 W Heating + 90 W Cooling	Fast Cooling 2L /Hr Cold Water
Over-Current Protection	Hot ,Cold and Normal Function
High efficiency Compressor	3 Tap
Dimensions (mm)	315 x 335 x 530
Net / Gross weight (Kg)	8.5 / 9.5
Loading (20"/40'HQ Units)	560/1230
Voltage (V, Hz)	220-240V 50-60Hz

WATER DISPENSER



AF-1950GSGB

Specifications

Watts (W)	1950
Water Tank Capacity (Ltr)	1.6
Heating Time (Sec)	30
Air output (g/min)	32
Type	Single Telescopic Pole
Working time (Min)	50
Dimensions Carton (mm)	820 x 375 x 365
Loading (20"/40'HQ Units)	750/1854
Net / Gross weight (Kg)	3.17 / 4
Voltage (V, Hz)	220-240V 50-60Hz

GARMENT STEAMER



AF-1950GSRD

Specifications

Watts (W)	1950
Water Tank Capacity (Ltr)	1.6
Heating Time (Sec)	30
Air output (g/min)	32
Type	Double Telescopic Poles
Working time (Min)	50
Dimensions Carton (mm)	865 x 445 x 375
Loading (20"/40'HQ Units)	630/1380
Net / Gross weight (Kg)	3.5 / 4.3
Voltage (V, Hz)	220-240V 50-60Hz

GARMENT STEAMER

ELECTRONICS

GARMENT STEAMER | EMERGENCY LIGHT



AF-1950GSWB

Specifications

Watts (W)	1950
Water Tank Capacity (Ltr)	2
Heating Time (Sec)	30
Air output (g/min)	32
Type	Double Telescopic Poles
Working time (Min)	60
Dimensions Carton (mm)	970 x 445 x 360
Loading (20'/40'HQ Units)	540/1320
Net / Gross weight (Kg)	3.8 / 4.6
Voltage (V, Hz)	220-240V 50-60Hz



AF-3503ELBL

Specifications

Mode	Rechargeable lantern
Battery	Li-ion 1500mAh
Input	USB cable Type C
Working time	4-5 hrs
Charging time	2 hrs
Product size (mm)	96 x 96 x 162
Loading (20'/40'HQ Units)	14775 / 35354
Net / Gross weight (g)	0.26 / 0.18
Voltage (V, Hz)	220-240V 50-60Hz



AF-0512BTPL

Specifications

Power (W)	12
Voltage (V)	3.7 DC
Luminous	1000
Type	USB A - type
Battery	SC Li-ion 6000mAh
Water proof rate	IP66
Working Time	6 Hours
Range distance	1000 meters long-range
Net / Gross weight (Kg)	0.66 / 0.71



AF-2403RLNM

Specifications

Mode	Rechargeable lantern
Battery	Lead acid battery 6V 4000mAh
Input	AC plug / DC solar charging port
Output	USB port
Working time	High 5hrs, low 7hrs
Charging time	12 hrs
Product size (mm)	158.5 x 81 x 310
Loading (20'/40'HQ Units)	3800 / 9200
Net / Gross weight (g)	1.10 / 1.15
Voltage (V, Hz)	220-240V 50-60Hz

GARMENT STEAMER

EMERGENCY LANTERN

RECHARGEABLE TORCH

EMERGENCY LIGHT



AF-6700ELRD

Specifications

Mode	Rechargeable lantern
Battery	Lead acid battery 6V 4000mAh
Input	AC plug / DC solar charging port
Output	USB port
Working time	High 5hrs, low 7hrs
Charging time	12 hrs
Product size (mm)	158.5 x 81 x 310
Loading (20'/40'HQ Units)	3470 / 8303
Net / Gross weight (KGS)	1.35 / 1.11
Voltage (V, Hz)	220-240V 50-60Hz



Specifications

Capacity (Ltr)	5.6
Watts (W)	2000
Package	1pcs/carton
Dimension (Carton mm)	442x442x323
Product size (mm)	143 x 78 x 261
Loading (20'/40'HQ Units)	4637 / 11095
Net / Gross weight (KGS)	1.35 / 1.11
Voltage (V, Hz)	220-240V 50-60Hz



AF-3305ELBK

Specifications

Mode	Rechargeable lantern
Battery	Lead acid battery 6V 4000mAh
Input	USB / DC solar charging port
Working time	H: 5hrs, M:15hrs, L: 7hrs
Charging time	12 hrs
Product size (mm)	169 x 84.5 x 307
Loading (40'HQ Units)	49556
Net / Gross weight (KGS)	1.45 / 1.22
Voltage (V, Hz)	220-240V 50-60Hz



AF-4002RLNM

Specifications

Mode	Rechargeable lantern
Battery	6V 4.0Ah Lead-acid battery
Input	AC Plug / DC Solar Charging port
Working time	H 6 hrs, L 8 hrs, S 12 hrs
Charging time	12 hrs
Product size (mm)	169 x 84.5 x 307
Loading (20,40HQ Units)	2900 / 7100
Net / Gross weight (KGS)	1.22 / 1.70
Voltage (V, Hz)	220-240V 50-60Hz

EMERGENCY LIGHT

EMERGENCY LIGHT

EMERGENCY LIGHT

EMERGENCY LIGHT

ELECTRONICS

VACUUM CLEANER | ELECTRIC FAN

VACUUM CLEANER



VACUUM CLEANER

AF-2000VCRD

Specifications

Watts (W)	2000
Capacity (Ltr)	2.5
Vacuum type	Cyclone Vacuum
Vacuum (kPa)	23
Noise (dBa)	78
Cyclonic tech separating dust	Bag-less
Dimensions Carton (mm)	460 x 300 x 340
Loading (20'/40'/40'HQ Units)	600/1200/1500
Net / Gross weight (Kg)	5.0/ 6.0
Voltage (V, Hz)	220-240V 50-60Hz

AF-1200VCSS

Specifications

Watts (W)	1200
Capacity (Ltr)	25
Vacuum type	Drum / Vet & Dry
Vacuum (kPa)	16
Noise (dBa)	80
Cyclonic tech separating dust	Bag-less
Dimensions Carton (mm)	335 x 335 x 555





AF-1660BKR

Specifications

Electric Stand Fan	Adjustable Height
Power (W)	60
5 pp Blades	16 Inch
1-7.5 Hours Timer	1250 RPM
3 Fan Modes	High - Middle - Low
Low Noise Motor	With Remote
Box Dimension	510 x 170 x 440 mm
Net / Gross weight (Kg)	4.8 / 5.5
Voltage (V, Hz)	220-240V 50-60Hz



AF-1660BK

Specifications

Electric Stand Fan	Adjustable Height
Power (W)	60
5 pp Blades	16 Inch
1-7.5 Hours Timer	1250 RPM
3 Fan Modes	High - Middle - Low
Low Noise Motor	Mechanical Control
Box Dimension	510 x 170 x 440 mm
Net / Gross weight (Kg)	4.8 / 5.5
Voltage (V, Hz)	220-240V 50-60Hz



AF-1612WFB

Specifications

Wall Mount Fan with Remote	
Power (W)	60
5 pp Blades	16 Inch
0.5-7.5 Hours Timer	1250 RPM
3 Fan Modes	High - Middle - Low
Wind mode	Natural - Normal - Sleep
Box Dimension (mm)	450 x 250 x 440
Net / Gross weight (Kg)	2.4 / 3.3
Voltage (V, Hz)	220-240V 50-60Hz



AF-1612WFBK

Specifications

Wall Mount Fan	
Power (W)	60
5 pp Blades	16 Inch
0.5-7.5 Hours Timer	1250 RPM
3 Fan Modes	High - Middle - Low
Wind mode	Natural - Normal - Sleep
Box Dimension (mm)	510 x 210 x 510
Net / Gross weight (Kg)	2.9 / 3.8
Voltage (V, Hz)	220-240V 50-60Hz

ELECTRIC FAN

ELECTRIC FAN

WALL MOUNT FAN

WALL MOUNT FAN

ELECTRONICS

ELECTRIC FAN | EXTENSION SOCKET



AF-1645WT

Specifications

Electric Table Fan	Adjustable Height
Power (W)	60
5 pp Blades	16 Inch
Mechanical control	1250 RPM
3 Fan Modes	High - Middle - Low
Box Dimension	345 x 130 x 360 mm
Net / Gross weight (Kg)	2.5 / 2.8
Voltage (V, Hz)	220-240V 50-60Hz



AF-1260TFWT

Specifications

Electric Table Fan	Adjustable Height
Power (W)	60
5 pp Blades	12 Inch
Mechanical control	1250 RPM
3 Fan Modes	High - Middle - Low
Box Dimension	345 x 130 x 360 mm
Net / Gross weight (Kg)	2.0 / 2.5
Voltage (V, Hz)	220-240V 50-60Hz



AF-2400FSAC

Specifications

Electric Table Fan	Box Fan
Power (W)	45
5 pp Blades	10 Inch
Mechanical control	1250 RPM
3 Fan Modes	3 Speeds
Box Dimension	333 x 138 x 383 mm
Net / Gross weight (Kg)	1.5/ 2.2
Voltage (V, Hz)	220-240V 50-60Hz



AF-003EXGY-USB

Specifications

Extension Socket	2 Way
Power Level	13A
5 Universal Sockets	3 Meter Cable
Easy Set-Up & Storage	Shockproof
ISO 9001 Quality Guaranteed	Fire-resistant materials
Silver-Nickel for Optimum Switch Life	Separate power switch
High quality copper	High Conductivity
Net / Gross weight (Kg)	0.56/ 0.64
Voltage (V, Hz)	220-240V 50-60Hz

TABLE FAN

TABLE FAN

TABLE FAN

EXTENSION SOCKET



AF-005EXRD-5MT

Specifications

Extension Socket	5 Way
Power Level	13A
5 Universal Sockets	5 Meter Cable
Easy Set-Up & Storage	Shockproof
ISO 9001 Quality Guaranteed	Fire-resistant materials
Silver-Nickel for Optimum Switch Life	Separate power switch
High quality copper	High Conductivity
Net / Gross weight (Kg)	0.88/ 0.95
Voltage (V, Hz)	220-240V 50-60Hz



AF-005EXRD

Specifications

Extension Socket	5 Way
Power Level	13A
5 Universal Sockets	3 Meter Cable
Easy Set-Up & Storage	Shockproof
ISO 9001 Quality Guaranteed	Fire-resistant materials
Silver-Nickel for Optimum Switch Life	Separate power switch
High quality copper	High Conductivity
Net / Gross weight (Kg)	0.75/ 1.5
Voltage (V, Hz)	220-240V 50-60Hz



AF-004EXRD

Specifications

Extension Socket	4 Way
Power Level	13A
5 Universal Sockets	10 Meter Cable
Easy Set-Up & Storage	Shockproof
ISO 9001 Quality Guaranteed	Fire-resistant materials
Silver-Nickel for Optimum Switch Life	Separate power switch
High quality copper	High Conductivity
Net / Gross weight (Kg)	0.67/ 0.75
Voltage (V, Hz)	220-240V 50-60Hz



AF-004EXRD

Specifications

Extension Socket	4 Way
Power Level	13A
5 Universal Sockets	10 Meter Cable
Easy Set-Up & Storage	Shockproof
ISO 9001 Quality Guaranteed	Fire-resistant materials
Silver-Nickel for Optimum Switch Life	Separate power switch
High quality copper	High Conductivity
Net / Gross weight (Kg)	0.67/ 0.75
Voltage (V, Hz)	220-240V 50-60Hz

EXTENSION SOCKET

EXTENSION SOCKET

EXTENSION SOCKET

EXTENSION SOCKET

ELECTRONICS

EXTENSION SOCKET | RECHARGEABLE FAN

EXTENSION SOCKET



AF-004EXRD

Specifications

Extension Socket	4 Way
Power Level	13A
5 Universal Sockets	3 Meter Cable
Easy Set-Up & Storage	Shockproof
ISO 9001 Quality Guaranteed	Fire-resistant materials
Silver-Nickel for Optimum Switch Life	Separate power switch
High quality copper	High Conductivity
Net / Gross weight (Kg)	0.6/ 0.68
Voltage (V, Hz)	220-240V 50-60Hz

EXTENSION SOCKET



AF-004EXGY -USB

Specifications

Extension Socket	3 Way
Power Level	13A
5 Universal Sockets	3 Meter Cable
Easy Set-Up & Storage	Shockproof
ISO 9001 Quality Guaranteed	Fire-resistant materials
Silver-Nickel for Optimum Switch Life	Separate power switch
High quality copper	High Conductivity
Net / Gross weight (Kg)	0.6/ 0.68
Voltage (V, Hz)	220-240V 50-60Hz

EXTENSION SOCKET



AF-003EXRD-5MT

Specifications

Extension Socket	3 Way
Power Level	13A
5 Universal Sockets	5 Meter Cable
Easy Set-Up & Storage	Shockproof
ISO 9001 Quality Guaranteed	Fire-resistant materials
Silver-Nickel for Optimum Switch Life	Separate power switch
High quality copper	High Conductivity
Net / Gross weight (Kg)	0.75/ 0.83
Voltage (V, Hz)	220-240V 50-60Hz

EXTENSION SOCKET



AF-003EXRD

Specifications

Extension Socket	4 Way
Power Level	13A
5 Universal Sockets	3 Meter Cable
Easy Set-Up & Storage	Shockproof
ISO 9001 Quality Guaranteed	Fire-resistant materials
Silver-Nickel for Optimum Switch Life	Separate power switch
High quality copper	High Conductivity
Net / Gross weight (Kg)	0.54/ 0.62
Voltage (V, Hz)	220-240V 50-60Hz

**AF-2301RECF****Specifications**

Power (W)	18 - 26
Size (Inch)	12
Motor speed (RPM)	1650
Type	8 pcs LED lights
Input (v)	12 AC / DC
Output	USB port
Battery Size	6V 4500mAh lead acid battery
Working time (battery)	30 H (LED) / 5H (FAN)
Charging time	15 H
Net / Gross weight (Kg)	2.7 / 3.5

**AF-0920RFNS****Specifications**

Power (W)	16
Size (Inch)	9
Motor speed (RPM)	1750
Type	20 PCS Led Light
Input (v)	220-240V 50-60Hz
Output	USB port
Battery Size	6V 4000mAh Led acid battery
Working time (battery)	3.5 to 5 hours
Charging time	8 H
Net / Gross weight (Kg)	2 / 2.5

**AF-1010USBF****Specifications**

Power (W)	5
Size (Inch)	6
Motor speed (RPM)	1650
Type	16 SMD lights
Input	5v / 1A
Output	No USB output
Battery Size	Li-ion 3.7V 1800mAh
Working time (battery)	1.5 - 5 hrs
Charging time	3 H
Net / Gross weight (Kg)	2.9 / 3.8

**AF-3200RECF****Specifications**

Power (W)	33
Size (Inch)	12
Motor speed (RPM)	1650
Type	16 SMD lights
Input (v)	12 AC / DC
Output	USB port
Battery Size	6V 4500mAh lead acid battery
Working time (battery)	30 H (LED) / 5H (FAN)
Charging time	15 H
Net / Gross weight (Kg)	3 / 3.5



AF-20LLED

Specifications

Mode	Mini 4 leaf fold-able LED bulb
Colour temperature	6500K
Luminous Flux	1500 Lm
Max Power	30 Watts
Product size (mm)	190 x 190 x 80
Dimensions Carton (mm)	68 x 68 x 98
Loading (40'HQ Units)	97543
Net / Gross weight (g)	80 / 100
Voltage (V, Hz)	220-240V 50-60Hz
Net / Gross weight (KGS)	0.11 / 0.08

AF-540LLED

Specifications

Power (W)	48
Size (Inch)	6
Motor speed (RPM)	1650
Color temperature	6500K
Luminous Flux	4300LM
5 leaf fold-able LED bulb	B22 base
Battery Size	6V 4500mAh lead acid battery
Working time (battery)	30 H (LED) / 5H (FAN)
Loading (40'HQ Units)	17558
Net / Gross weight (KGS)	0.37 / 0.27

AF-288LEDB

Specifications

Mode	AC/DC rechargeable led bulb
Battery	3.7V 4000mAh lead acid battery
B22 base	Detachable head
Working time	DC 2 hours working
Product size (mm)	90 x 90 x 116
Dimensions Carton (mm)	100 x 100 x 117
Loading (40'HQ Units)	49556
Net / Gross weight (g)	242 / 204
Voltage (V, Hz)	220-240V 50-60Hz
Net / Gross weight (KGS)	0.26 / 0.22

AF-2990LEDB

Specifications

Mode	LED bulb
Battery	3.7V 1500mAh Li-ion battery
Working time	4 hrs
Charging time	7 hrs
Product size (mm)	85 x 85 x 155
Dimensions Carton (mm)	87 x 87 x 155
Loading (40'HQ Units)	97543
Net / Gross weight (g)	120 / 157
Voltage (V, Hz)	220-240V 50-60Hz
Net / Gross weight (KGS)	0.17 / 0.12



AF-0003COMB

Specifications

Power (W)	5
Voltage (V)	3.7 DC
Luminous	160
Type	3 in 1 combo (2SC + 2PCS 3SC)
Battery	Li-ion 1500mAh
Water proof rate	IP44
Working Time	6 Hours
Range distance	300 meters long-range
Net / Gross weight (Kg)	1.6 / 1.7



AF-0002COMB

Specifications

Power (W)	5
Voltage (V)	3.7 DC
Luminous	160
Type	3 in 1 combo (2SC + 3SC)
Battery	Li-ion 1500mAh
Water proof rate	IP44
Working Time	6 Hours
Range distance	300 meters long-range
Net / Gross weight (Kg)	1.1 / 1.2



AF-0002DSET

Specifications

Power (W)	5
Voltage (V)	3.0 DC
Luminous	200
Type	Single (3D)
Battery	Ni-CD 3000 mAh
Water proof rate	IP44
Working Time	8 Hours
Range distance	350 meters long-range
Net / Gross weight (Kg)	0.75 / 0.77



AF-0004COMB

Specifications

Power (W)	5
Voltage (V)	3.7 DC
Luminous	160
Type	4 in 1 combo (2SC + 3PCS 3SC)
Battery	Li-ion 1500mAh
Water proof rate	IP44
Working Time	6 Hours
Range distance	300 meters long-range
Net / Gross weight (Kg)	2.15 / 2.25

FLASH LIGHT

FLASH LIGHT

FLASH LIGHT

FLASH LIGHT

ELECTRONICS

FLASH LIGHTS | HAIR CLIPPERS | HAIR TRIMMER



AF-0001AATR

Specifications

Power (W)	3
Voltage (V)	1.5 DC
Luminous	160
Type	Single
Battery	AA size
Water proof rate	IP44
Working Time	3-6 Hours
Range distance	150 meters long-range
Net / Gross weight (Kg)	0.3 / 0.35



AF-0003DSET

Specifications

Power (W)	6.25
Voltage (V)	3.7 DC
Luminous	200
Type	Single
Battery	SC Li-ion 3000mAh
Water proof rate	IP44
Working Time	10 Hours
Range distance	1000 meters long-range
Net / Gross weight (Kg)	0.87 / 0.9



AF-0003SCTR

Specifications

Power (W)	5
Voltage (V)	3.7 DC
Luminous	160
Type	Single
Battery	SC Li-ion 3000mAh
Water proof rate	IP44
Working Time	6 Hours
Range distance	300 meters long-range
Net / Gross weight (Kg)	0.6 / 0.65



AF-0002SCTR

Specifications

Power (W)	5
Voltage (V)	3.7 DC
Luminous	160
Type	Single
Battery	SC Li-ion 1500mAh
W	IP44
Working Time	6 Hours
Range distance	300 meters long-range
Net / Gross weight (Kg)	0.5 / 0.57

FLASH LIGHT

FLASH LIGHT

FLASH LIGHT

FLASH LIGHT



AF-0003HTBK

Specifications

Power (W)	3
3 in 1 hair clipper	Cordless operation
Stainless steel blade	Charging time 8 hours
Battery Capacity	NI-MH 600mAh
Use time	35 mins
Rated voltage	DC 5V 1A
Accessories: Trimmer head	Ear/Nose trimmer, Shaver head
3xlimit comb, USB cable, Base	Cleaning brush, oil bottle
Product Carton Size (mm)	158 x 50 x 203



AF-0005HCWT

Specifications

Power (W)	5
Hair Clipper With Led Display	Cordless operation
Copper blade	Charging Time 2h
Battery Capacity	Li-ion 600mah
Use time	100 mins
Rated voltage	DC 5V 1A
Product Size (mm)	41 x 36 x 139
Product weight (g)	120
Voltage (V, Hz)	220-240V 50-60Hz



AF-0005HTGR

Specifications

Power (W)	3
Rechargeable Hair Clipper	Charging Indicator Light
Stainless steel blade	Charging time 2 hours
Battery Capacity	NI-MH 600mAh
Use time	90 mins
Rated voltage	DC 5V 1A
Precision T-Blade	Full-size trimmer
Product Size (mm)	38 x 35 x 154
Product weight (g)	360
Voltage (V, Hz)	220-240V 50-60Hz



AF-0045NSBK

Specifications

Power (W)	3
Nose Trimmer perfectly trims hairs	With precision
Stainless steel head	Operates without snagging
Pulling hairs for a pleasant grooming	Ergonomic design
Safe and easy to operate	Made from ABS plastic
Comes with USB Cable	Easy and efficient charging
Dimensions	54.2x36.7x33.5 cm
Product Carton Size (mm)	44 x 37 x 152
Product weight (g)	80
Voltage (V, Hz)	220-240V 50-60Hz

PERSONAL CARE

HAIR CLIPPERS | TRIMMER | FACIAL STEAMER | BRUSH DRYER

NOSE CLIPPER



AF-0145NSBK

Specifications

Power (W)	3
Nose trimmer set	With precision
Safe and effective curved blade	No impairment of hair function
IPX0	Ergonomic design
Nose trimmer	Beard trimmer
Cleaning brush	Based stand
Product Size (mm)	130 x 45 x 185
Product weight (g)	72.7
Battery	1xAA battery operated

HAIR TRIMMER



AF-600HCBK

Specifications

Power (W)	5
3 in 1 hair clipper	Support fast charging
Stainless steel blade	Charging time 2 hours
Battery Capacity	Li-ion 600mah
Use time	90 mins
Rated voltage	DC 5V 1A
R-shaped processing	Alloy cutter
Product Size (mm)	45 x 45 x 180
Product weight (g)	140
Voltage (V, Hz)	220-240V 50-60Hz

HAIR TRIMMER



AF-0600HTBK

Specifications

Power (W)	3
Specifically-engineered blades cut	Cordless operation
Extra-compact trimming blade	Safe trimming in sensitive areas
Ultra-quiet operation low vibration	Extra-powerful motors
100% Waterproof designs	Whole washable body
Waterproof rating	IPX7
Detachable blade, easy for cleaning	Adjustable guide comb
Product Size (mm)	152 x 36.5 x 40
Product weight (g)	126
Battery	Li-ion battery 600mAh

HAIR TRIMMER



AF-1600HTSB

Specifications

Power (W)	3
AFRA Hair Trimmer 5 In 1 Set	Stainless steel blade
Rechargeable, with Shaver	Precision Trimmer
Battery Capacity	NI-MH 2x600mAh battery
Charging time between 8-12 hours	Use time 1 hour
Rated voltage	DC 5V 1A
Product Carton Size (mm)	134 x 87 x 195
Product Size (mm)	152 x 36.5 x 40
Product weight (g)	330
IPX0	



AF-600LSWT

Specifications

Power (W)	5
Rechargeable multifunction kit	IPX6
Charging time	2 hours
Battery Capacity (mah)	Li-ion 600
Working time (min)	90
Rated voltage	DC 5V 1A
Dimensions Carton (mm)	147 x 80 x 208
Loading (40'HQ Units)	23640
Net / Gross weight (g)	500/ 600
Voltage (V, Hz)	220-240V 50-60Hz



AF-0100FSWT

Specifications

Power (W)	100
PTC fast heater	Boiling within 3-min
3 settings 0/1/2 Control	LED power indicator
Capacity	50 ml
Teflon non-stick pan technology	Steam Control design
Over-heating safety protection	
Dimensions Carton (mm)	195 x 195 x 220
Loading (40'HQ Units)	6996
Net / Gross weight (g)	603/ 750
Voltage (V, Hz)	220-240V 50-60Hz



AF-0150FSWT

Specifications

Power (W)	235
Water tank	50 ml
Working time	15 min
With Measuring cup	
Production size (mm)	107 x 107 x 170
Dimensions Carton (mm)	140 x 115 x 175
Loading (40'HQ Units)	21140
Net / Gross weight (g)	419/ 560
Voltage (V, Hz)	220-240V 50-60Hz



AF-1200BDBK

Specifications

Power (W)	1200
Brush Dryer	Anti scald head
Power control	Bristle short comb tooth
Hang-up hook for safe	Anti scald head
Power control 0-Cool-1-2 settings	360 degree swivel cord
Dimensions Carton (mm)	435 x 105 x 55
Loading (40'HQ Units)	14800
Net / Gross weight (g)	520 / 600
Voltage (V, Hz)	220-240V 50-60Hz

LADY SHAVER

FACIAL STEAMER

FACIAL STEAMER

BRUSH DRYER

PERSONAL CARE

HAIR DRYER | HAIR CURLER | HAIR STRAIGHTENER

HAIR DRYER



AF-1000HDBK

Specifications

Power (W)	1000
2 Speeds, 2 Heat Settings	Easy-To-Use
Hang-Up Hook For Safe Storage	Can be easily set
Suitable for almost all types of hair	Made from ABS plastic
Hang-up hook for safe	Perfect finish you want
Efficient storage	Comes with BS plug
Product Size (mm)	169.5 x 66.2 x 217.5
Loading (40'HQ Units)	34560
Product weight (g)	363
Voltage (V, Hz)	220-240V 50-60Hz

HAIR DRYER



AF-1400HDPG

Specifications

Power (W)	1400
AFRA Hair Dryer	DC Motor
Multiple Temperature Settings	Folding Handle
Suitable for almost all types of hair	Hang-Up Loop
Off-cool-low-high settings	
Product Size (mm)	190 x 80 x 270
Loading (40'HQ Units)	16152
Product weight (g)	500
Voltage (V, Hz)	220-240V 50-60Hz

HAIR DRYER



AF-2300HDBK

Specifications

Power (W)	2300
2 Speed & 3 heat settings	Cool shot function
Powerful airflow	Concentrator
Easy-to-set at your convenience	Ionic function
Suitable for drying, varied styling	Removable easy-to-clean
Product Size (mm)	289 x 95 x 290
Loading (40'HQ Units)	8520
Product weight (g)	580
Voltage (V, Hz)	220-240V 50-60Hz

HAIR DRYER



AF-2309HDBK

Specifications

Power (W)	2300
AFRA Hair Dryer	DC Motor
2 Speeds & 3 Heat settings	Concentrator
Multiple Temperature Settings	With removable filter
Suitable for almost all types of hair	Hang-up hook
Product Size (mm)	277.7 x 234.7 x 92.2
Loading (40'HQ Units)	9120
Product weight (g)	522
Voltage (V, Hz)	220-240V 50-60Hz



AF-360HCGY

Specifications

Power (W)	45
Hair curler	Ceramic coating barrel
Adjustable Temperature	Cool tip for safety touch
PTC heater - LED display	360 swivel cord
Power level indicator	60 min switch off
Cool tip provides safety	Protection from burns
Product size (mm)	370 x 50 x 85
Loading (40'HQ Units)	24600
Product weight (g)	360
Voltage (V, Hz)	220-240V 50-60Hz



AF-0025HBK

Specifications

Rated Input Power (W)	25
Aluminum tube size (mm)	9.5
Max Temperature	200 °C
Ceramic Coating	Tourmaline Bessel
Rotation	360 °C swivel cord
Product size (mm)	355 x 43 x 43
Loading (40'HQ Units)	34560
Net / Gross weight (g)	390 / 450
Voltage (V, Hz)	220-240V 50-60Hz



AF-0055HSSB

Specifications

Power (W)	55
PTC heater	Stainless steel blade
Plate size (mm)	45 x 1.10
Ceramic coating plates	LED / LCD Display
Temperature with 4 heat	Setting: 120/150/180/210°C
Heating up time to max temp	230 °C
Fast working	Automatic cut-off ensures safe
Loading (40'HQ Units)	30552
Product weight (g)	360
Voltage (V, Hz)	220-240V 50-60Hz



AF-0043HSBK

Specifications

Power (W)	41
Aluminum plates	Ceramic coating
360° Swivel Coard	2 hours
Product size (mm)	31 x 30 x 320
Plate size (mm)	25 x 121
PTC fast heating	DC 5V 1A
Max. Temperature	210 C
Loading (40'HQ Units)	42384
Product weight (g)	305
Voltage (V, Hz)	220-240V 50-60Hz

PERSONAL CARE

HAIR STRAIGHTENER - MOBILE ACCESSORIES



AF-4000HSGY

Specifications

Power (W)	22
Rechargeable Hair Straightener	Ceramic coating plate
Standby time / Using time (mins)	90 / 30
Power level indicator	35% 65% 100%
Battery Capacity	Li-ion 4000mAH (21700)
With floating plate	Hair straightener is compact
Product Size (mm)	35 x 35 x 223
Loading (40'HQ Units)	28104
Net Weight (g) / Plate size (mm)	215 / 62 x 20
Voltage (V, Hz)	220-240V 50-60Hz

HAIR STRAIGHTENER





AF-0006PDTC

Specifications

AFRA USB Charging Cable	Type C To Lightning
USB Type	2.0
Power Ability	20W - 3A
Data transmission speed	48 mb/s
Cable Type	Nylon-Braided Jacket
Cable length	1 Meter
Compatibility	iPhone, iPad and iPod
High quality copper	High Conductivity
Durable	Tangle Free



AF-0006TYPC

Specifications

AFRA USB Charging Cable	USB Type C To USB Type C
USB Type	2.0
Power Ability	60W - 3A
Data transmission speed	48 mb/s
Cable Type	Nylon-Braided Jacket
Cable length	1 Meter
Compatibility	Android, And Other Devices
High quality copper	High Conductivity
Durable	Tangle Free



AF-0003MUSB

Specifications

AFRA USB Charging Cable	USB A To Micro-USB
USB Type	2.0
Power Ability	12W - 2.4A
Data transmission speed	48 mb/s
Cable Type	Nylon-Braided Jacket
Cable length	1 Meter
Compatibility	Mid-Range Mobile Phones
High quality copper	High Conductivity
Auto-Disconnect Function	LED Indicator



AF-0003TYPC

Specifications

AFRA USB Charging Cable	USB A To USB Type C
USB Type	2.0
Power Ability	18W - 3.6A
Data transmission speed	48 mb/s
Cable Type	Nylon-Braided Jacket
Cable length	1 Meter
Compatibility	Android, And Other Devices
High quality copper	High Conductivity
Auto-Disconnect Function	LED Indicator

USB CHARGING CABLE

USB CHARGING CABLE

USB CHARGING CABLE

USB CHARGING CABLE

MOBILE ACCESSORIES

USB CABLES | CHARGER

USB CHARGING CABLE



AF-0003LIGC

Specifications

AFRA USB Charging Cable	USB A To Lightning Connector
USB Type	2.0
Power Ability	15W - 2.4A
Data transmission speed	48 mb/s
Cable Type	Nylon-Braided Jacket
Cable length	1 Meter
Compatibility	iPhone, iPad and iPod
High quality copper	High Conductivity
Durable	Heat Resistant

USB CHARGING CABLE



AF-0031MUSB

Specifications

Retractable USB Charging Cable	USB A Three-In-One
USB Type	2.0
Power Ability	12W - 2.4A
Data transmission speed	48 mb/s
Cable Type	Nylon-Braided Jacket
Cable length	1.2 Meter
Features	Durable
High quality copper	High Conductivity
Nylon-Braided Jacket	Tangle Free

USB CHARGING CABLE



AF-0012MTPE

Specifications

Retractable USB Charging Cable	USB A Three-In-One
USB Type	2.0
Power Ability	12W - 2.4A
Data transmission speed	48 mb/s
Cable Type	PVC
Cable length	1.2 Meter
Compatibility	All Mobile Phones
Features	Durable
High quality copper	High Conductivity
Black ABS+TPE Construction	Tangle Free

USB CHARGING CABLE



AF-0042TYPC

Specifications

AFRA USB Charging White Cable	USB Type A To USB Type C
USB Type	2.0
Power Ability	12W - 2.4A
Data transmission speed	48 mb/s
Cable Type	Nylon-Braided Jacket
Cable length	1 Meter
Compatibility	Android, And Other Devices
High quality copper	High Conductivity
Features	PVC Serrated Cable Cord
Durable	Heat Resistant



AF-0042USBA

Specifications

AFRA USB Charging White Cable	USB A To Lightning Connector
USB Type	2.0
Power Ability	12W - 2.4A
Data transmission speed	48 mb/s
Cable Type	PVC
Cable length	1 Meter
Compatibility	iPhone, iPad and iPod
High quality copper	High Conductivity
Features	PVC Serrated Cable Cord
Durable	Heat Resistant

AF-0042MUSB

Specifications

AFRA USB Charging White Cable	USB A To Micro USB
USB Type	2.0
Power Ability	12W - 2.4A
Data transmission speed	48 mb/s
Cable Type	PVC
Cable length	1 Meter
Compatibility	Mid-Range Mobile Phones
High quality copper	High Conductivity
Durable	Heat Resistant

AF-0020DUSB

Specifications

AFRA USB Wall Charger	Dual Ports
Power Ability	38W
Ports	2x USB A
Charging speed	3A /2.4A
Compatibility	USB A Devices
Short Circuit Protection	Overheat Protection
Fast Charging	Compact Design
Voltage (V, Hz)	220-240V 50-60Hz

AF-0018AUSB

Specifications

AFRA USB Wall Charger	Dual Ports
Power Ability	30W
Ports	2x USB A
Charging speed	1.5A / 2.4A
Compatibility	USB A Devices
Short Circuit Protection	Overheat Protection
Fast Charging	Compact Design
Voltage (V, Hz)	220-240V 50-60Hz

USB CHARGING CABLE

USB CHARGING CABLE

USB WALL CHARGER

USB WALL CHARGER

ELECTRONICS

USB CABLES | DRY IRON | STEAM IRON

USB CAR CHARGER



AF-0095USBC

Specifications

AFRA USB Car Charger	Dual Ports
Power Ability	32W
Ports	1x USB-C / 2x USB A
Charging speed	3A /2.4A
Compatibility	USB-C / USB A Devices
Short Circuit Protection	Overheat Protection
Fast Charging	Compact Design
Voltage (V, Hz)	220-240V 50-60Hz



**AF-1800DIWH****Specifications**

Power (W)	1000
Automatic Dry Iron	1.8kg Heavy Duty Dry Iron
Gold Teflon Coating	Non-Stick Sole Plate
Turbo Thermostat Control	Plastic Handle Grip, Thumb's Rest
Glossy Metal Cover	6 Temperature Settings
Auto Cut Off	Heat Resistant Cotton Cord
Dimensions Carton (mm)	286 x 127 x 152
Loading (20'/40'HQ Units)	4600/10000
Net / Gross weight (Kg)	1.8/ 2
Voltage (V, Hz)	220-240V 50-60Hz

AF-2600IRBG**Specifications**

Power (W)	2600
Dry/Steam/Spray/Burst of Steam	Vertical Steam
Steam Burst function	Self Clean Function
Long life Ceramic soleplate	Spray Jet
Water Tank Capacity (ml)	350
Dimensions Carton (mm)	310 x 130 x 155
Loading (20'/40'/40'HQ Units)	4100/8500/9700
Net / Gross weight (Kg)	1.0/ 1.2
Voltage (V, Hz)	220-240V 50-60Hz

**AF-2200IRWP****Specifications**

Power (W)	2200
Dry/Steam/Spray/Burst of Steam	Vertical Steam
Steam Burst function	Self Clean Function
Long life Ceramic soleplate	Spray Jet
Water Tank Capacity (ml)	450
Dimensions Carton (mm)	320 x 130 x 165
Loading (20'/40'/40'HQ Units)	3696/8064/9216
Net / Gross weight (Kg)	1.0/ 1.25
Voltage (V, Hz)	220-240V 50-60Hz

**AF-1600IRBL****Specifications**

Power (W)	1000 - 1600
Multifunction	Dry/Steam/Spray/Burst of Steam
Steam Burst function	Self Clean Function
Long life Ceramic soleplate	Spray Jet
Water Tank Capacity (ml)	100
Dimensions Carton (mm)	273 x 143 x 208
Loading (20'/40'/40'HQ Units)	3200/6688/7600
Net / Gross weight (Kg)	1.3/ 1.5
Voltage (V, Hz)	220-240V 50-60Hz



DRY IRON

STEAM IRON

STEAM IRON

CORDLESS STEAM IRON

ELECTRONICS

STEAM IRON | DRY IRON | MEDICAL DEVICES



AF-2200IRBL

Specifications

Power (W)	2200
Dry/Steam/Spray/Burst of Steam	Vertical Steam
Steam Burst function	Self Clean Function
Long life Ceramic soleplate	Spray Jet
Water Tank Capacity (ml)	450
Dimensions Carton (mm)	320 x 130 x 165
Loading (20'/40'/40'HQ Units)	3600/7500/8800
Net / Gross weight (Kg)	1.1/ 1.3
Voltage (V, Hz)	220-240V 50-60Hz



AF-1000DIBK

Specifications

Power (W)	1000
Dry Iron function	Non-stick soleplate
Dial thermostat control	180 degrees swivel cord
Pilot light	1.5M long cord
Dimensions Carton (mm)	250 x 112 x 118
Loading (20'/40'/40'HQ Units)	7320/1550/1680
Net / Gross weight (Kg)	0.55/ 0.67
Voltage (V, Hz)	220-240V 50-60Hz



AF-1000IRRD

Specifications

Power (W)	1000
Non stick coating	Indicator Light
Over Heat Safety Protection	Dial thermostat control
Dimensions Carton (mm)	252 x 105 x 120
Loading (20'/40'/40'HQ Units)	7200/15100/17700
Net / Gross weight (Kg)	0.52/ 0.67
Voltage (V, Hz)	220-240V 50-60Hz



AF-2000DIWH

Specifications

Power (W)	1000
Automatic Dry Iron	2kg Heavy Duty Dry Iron
Gold Teflon Coating	Non-Stick Sole Plate
Turbo Thermostat Control	Plastic Handle Grip, Thumb's Rest
Glossy Metal Cover	6 Temperature Settings
Auto Cut Off	Heat Resistant Cotton Cord
Dimensions Carton (mm)	286 x 127 x 152
Loading (20'/40'HQ Units)	4600/10000
Net / Gross weight (Kg)	2.0/ 2.5
Voltage (V, Hz)	220-240V 50-60Hz

STEAM IRON

DRY IRON

STEAM IRON

CORDLESS STEAM IRON



AF-201BPMA

Specifications

Dimensions (mm)	164x111x60
Systolic pressure	60 mmHg-260 mmHg
Pressure 30 mmHg-200 mmHg	Pulse 30 to 180 beats/minute
Measurement accuracy	Pressure \pm 3mmHg, Pulse \pm 5%
Digital screen display	Information clearly and concisely
Memory capacity	120 readings in two groups (D/T)
Inflatable arm cuff	Socio metric measurement
Weight	430g (excluding 4 AAA batteries)
Warranty	2 years



AF-200BPMA

Specifications

Dimensions (mm)	140x98x48
Systolic pressure	60 mmHg-260 mmHg
Pressure 30 mmHg-200 mmHg	Pulse 30 to 180 beats/minute
Measurement accuracy	Pressure \pm 3mmHg, Pulse \pm 5%
Digital screen display	Information clearly and concisely
Memory capacity	120 readings in two groups (D/T)
Inflatable arm cuff	Socio metric measurement
Weight	340g (excluding 4 AAA batteries)
Warranty	2 years



AF-202BPMW

Specifications

Dimensions (mm)	77x64x32.5
Systolic pressure	60 mmHg-260 mmHg
Pressure 30 mmHg-200 mmHg	Pulse 30 to 180 beats/minute
Measurement accuracy	Pressure \pm 3mmHg, Pulse \pm 5%
Circumference	13.5-21.5cm
Clear digital screen display	Information clearly and concisely
Inflatable arm cuff	Socio metric measurement
Weight	117g (excluding 4 AAA batteries)
Warranty	2 years



AF-203BPMW

Specifications

Dimensions (mm)	77x64x32.5
Systolic pressure	60 mmHg-260 mmHg
Pressure 30 mmHg-200 mmHg	Pulse 30 to 180 beats/minute
Measurement accuracy	Pressure \pm 3mmHg, Pulse \pm 5%
Circumference	13.5-21.5cm
Clear digital screen display	Information clearly and concisely
Inflatable arm cuff	Socio metric measurement
Weight	110g (excluding 4 AAA batteries)
Warranty	2 years

MEDICAL DEVICES

BLOOD PRESSURE MONITOR | FLEXIBLE THERMOMETER

THERMOMETER



AF-300DTFT

Specifications

AFRA Japan	Inst. Flexible Digital Thermometer
Flexible Tip - White	Digital display is clear, easy to read
Flexible tip allows for easy	Safe, and hassle-free placement
Can be used orally	Rectally or in underarm
Durable and break resistant	Water resistant design, construction
Device gives instant results	Quick and easy diagnosis
Celsius and Fahrenheit temp	Fever alarm for quick, prompt alert
Compact design	Easy to use and store
Warranty	2 years

THERMOMETER



AF-301ITG

Specifications

Dimensions (mm)	153x41x44
Operating temperature range	10-40 Celsius 50-104 Fahrenheit
Auto shut off within 1 minute	Can withstand drops of 3 feet
Memory capacity	10 readings
Non-contact infrared sensor	Readings without putting
No probe covers needed	Accurate readings within 1 second
Celsius and Fahrenheit temp	Minimizes close contact easily
Weight	84 grams (2 AAA batteries)
Warranty	2 years

THERMOMETER



AF-302ITE

Specifications

Flexible ear thermometer	
Memory capacity	10 readings
Clinically accurate	Fit safely and comfortably in ear
Celsius and Fahrenheit temp	Clear digital display, easy to read.
Automatic shut-off function	Optimal results in all conditions
Memory capacity	10 readings
Irregular heartbeat detection	
1 ear thermometer	1 owner's manual
Warranty	2 years

PULSE OXIMETER



AF-500PO

Specifications

Oximeter device rapidly detects level of oxygen saturation	
Dimensions (mm)	58.5mm x 36.5mm x 29
Blood oxygen saturation	Measuring range 70%-99%
Digital four color TFT display	Detect and estimate pulse rate
High accuracy, autocorrelation	Also emits sound alerts
Soft silicone mat	Automatic shutdown after 8 sec.
Compact, portable design	Uses 2 AAA batteries
Operating temperature	Between 5-40 degrees Celsius
Warranty	2 years



AF-600NA

Specifications

Dimensions (mm)	196x70x53
Nasal aspirator	White, AA Battery, Accessories
Compact design	Safely remove nasal obstruction
Designed for infants & children	Silicone probes soft & comfortable
3 options available	Sterilized for further use
Features disposable caps	Water proof
3 silicone probes	2 extra silicone seal rings
25 hygienic disposable caps	1 user manual
Warranty	2 years

AF-100GM

Specifications

Dimensions (mm)	50 X 87.3 X 17.5
Battery Type	One 3-volt lithium battery (CR2032)
Battery Life	Approximately 1,000 tests
Unit of Measurement	Mg/dL or mmol/L
Operating Ranges	Temperature: 10~40°C (50~104°F)
Relative Humidity	15~85%
Altitude	Up to 3048m (10000 feet)
Weight	47.2g or 1.7 oz. (with battery)
Memory Capacity	500 test results (with date, time & event)

AF-401MN

Specifications

Dimensions (mm)	46 (W) x 110 (H) x 60 (D)
Replacement medicine cup	Medicine cup capacity 8 ml
Mute design	Dual power supply via battery, USB
Compact design	Easy to use and store
1 medicine cup	1 main unit + 1 storage bag
1 mouthpiece + 2 AA batteries.	1 inhalation mask (adult)
1 inhalation mask (children)	1 Micro USB cable
Weight	80g (not including batteries)
Warranty	2 years

AF-200BPMA

Specifications

Dimensions (mm)	169 x 146 x 88
turns liquid medicine to vapors	60 mmHg-260 mmHg
Multiple options for inhalation	lther via mask, mouthpiece
Compact design	Ideal for users with any respiratory
1 compressor nebulizer	1 medicine cup
1 inhalation mask	1 mouthpiece, 1 nose-piece
1 air tube, 1 air filter	2 year warranty
Weight	110g (excluding 4 AAA batteries)
Power source	AC 230V, 50Hz.

FASHIONS

MENS | WOMENS

A F R A

W A T C H E S

**NEW RANGES OF STYLISH WATHES
NOW AVAILABLE!**



A F R A

J E W E L L E R Y

"Shine Bright, Sparkle Bold:

AFRA Jewellery has arrived!

Explore a world of exquisite craftsmanship and redefine your style"



- NECKALCE
- NECKLACE+EARRINGS SET
- BRACELET
- RING
- EARRING
- NECKLACE
- ANKLET

**NEW
COLLECTION**

LED SCREENS

INDOOR LED SCREEN | OUTDOOR LED SCREEN

ELEVATE YOUR BRAND WITH STUNNING LED SCREEN SOLUTIONS

INDOOR LED SCREEN | OUTDOOR LED SCREEN | DIGITAL SIGNAGE & VIDEO WALL
FINE PITCH LED DISPLAYS | TRANSPARENT LED SCREENS | MEDIA FACADES



ELECTRICAL

LIGHT FITTINGS | SWITCHES | SOCKETS

the technology you can trust
PRESENTED BY JAPANESE INNOVATION



MEDICAL DEVICES

HOME HEALTH CARE DEVICES



Well-being matters!

Presented by Japanese innovation

Blood Pressure Monitor

Arm-type fully automatic

Wrist-type fully automatic

Pulse Oximeter Portable

Thermometer

Digital Thermometer Instant Flexibl

Infrared Thermometer Gun-Type

Nebulizer

Compressor Nebuliz

Blood Glucose Monitoring System

Gluco Meter

Sterile Disposable Lancel

Humidifier

Electronic Breast Pum

TOOLS

POWER TOOLS | HAND TOOLS | INDUSTRIAL EQUIPMENT



POWER TOOLS | HAND TOOLS | INDUSTRIAL EQUIPMENT

CORDLESS

Impact Drill
Impact Wrench
Grinder
Orbital Sander
Trimmer
Saw
Portable Blower
Electric Drill

PETROL

Grass Cutter
Water Pump
Petrol Generator

ELECTRIC

Impact Drill
Rotary Hammer
Grinder
Car Polisher
Sander
Trimmer
Router
Planer
Saw
Mixer
Portable Blower
Heat Gun
Arc Welding Machine
Air Compressor

POWER
IN THE PALM OF
YOUR HAND
MINUS THE CORD



POWER UP YOUR LIFE WITH **AFRA TOOLS**

CCTV & ELV



seamless innovation

SAFEGUARDING SECURITY IN YOUR DIGITAL FORTRESS



CCTV

IP CCTV
AHD CCTV
WIFI CCTV
SOLAR WIFI/4G

ACCESSORIES

Racks&Cabinets
Connectors & brackets
POE Switches
Surveillance monitors
HDD & SSD

ELV CABLES

WI-FI & SMART HOME AUTOMATION
ACCESS CONTROL SYSTEM
VIDEO/AUDIO INTERCOM SYSTEM



SHOWROOMS



Shop No 39, Ground Floor, Bin Shabib Mall - Al Qusais 1 – Dubai



Shop No 8, Shaikh Latifa Building, Creek Road Deira, Dubai, U.A.E



Shop: SF-004, II Floor, Zabeel Expansion, Dubai Mall



Al KhanMall - Matajer - Al Khan – Sharjah



Bin Shabib Mall - Al Barsha - Al Barsha South – Dubai



Al Ghurair Center, Opp. Carrefour 1st Floor, Deira - Al Rigga - Dubai

Warehouse



28 33th D St - Umm Ramool - Dubai




HP26+VX - Umm Dera - Umm Al Quwain

CERTIFICATE

CERTIFICATE OF TRADEMARK REGISTRATION


JAPAN



商標登録証 (CERTIFICATE OF TRADEMARK REGISTRATION)

登録第6735253号
(REGISTRATION NUMBER)

商標
(THE MARK)

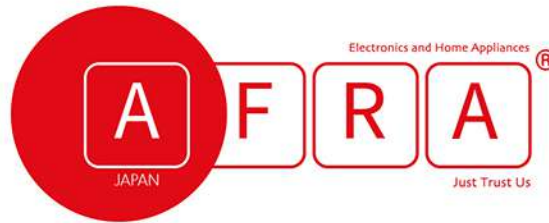

指定商品又は指定役務並びに商品及び役務の区分
(LIST OF GOODS AND SERVICES)

第7類 金属加工機械器具、アーク切断装置、型打ち機、縁取り機械（金属加工）、フライス盤、食料加工用又は飲
その他別紙記載

商標権者
(OWNER OF THE TRADEMARK RIGHT)

アラブ首長国連邦 ドバイ アルカベール アルソーク プロパティ オブ アブドゥルワヘッド アフマド ラッシュ ビン シャビブーバー ショップナンバー26

国籍・地域 アラブ首長国連邦
アワーズ ディストリビューション

出願番号
(APPLICATION NUMBER)

商願2022-143753

出願日
(FILING DATE)

令和4年12月16日 (December 16, 2022)

登録日
(REGISTRATION DATE)

令和5年9月12日 (September 12, 2023)

この商標は、登録するものと確定し、商標原簿に登録されたことを証する。
(THIS IS TO CERTIFY THAT THE TRADEMARK IS REGISTERED ON THE REGISTER OF THE JAPAN PATENT OFFICE.)

令和5年9月12日 (September 12, 2023)

特許庁長官

(COMMISSIONER, JAPAN PATENT OFFICE)

濱野幸一



FULL RANGE CATEGORIES IN AFRA



INSPIRED BY
JAPANESE INNOVATION



HOME APPLIANCES | KITCHEN APPLIANCES
 ELECTRONICS | ELECTRICAL | PERSONAL CARE | COOKWARE
 TOOLS | LED SCREENS | BATTERY | HVAC | PUMPS
 WATCHES | MEDICAL DEVICES | CCTV

☎ 600(AFRA)502372 ✉ customer care@afrauae.com

📍 Second Floor, Block 3, Bin Shabib Mall, AL Qusais-1, Dubai, U.A.E





A BRAND PRESENTED BY
ABDULWAHED BIN SHABIB INVESTMENT GROUP LLC.



 www.afrajapan.com  600(AFRA)502372

AFRA ALWAYS ATTEMPTS TO PROVIDE YOU THE VERY BEST QUALITY OF SERVICES.
ALL AFRA PRODUCTS COME WITH A 1 YEAR OF WARRANTY AGAINST DEFECT.

DISTRIBUTED BY

AWS DISTRIBUTION LLC
TEL: +971 4 2352333 | +971 4 332 88 70
info@afrauae.com | www.afrauae.com
DUBAI, U.A.E

MIDDLE EAST

KSA: info@afrasaudi Arabia.com
BAHRAIN: info@afrabahrain.com
KUWAIT: info@afrakuwait.com
QATAR: info@afra-qatar.com
OMAN: info@afraoman.com
CORPORATE: info@afrajapan.com

FAR EAST

ID 1349-785,
CREA LANDMARK 305
2-9 REISENMACHI, HAKATA WARD
FUKUOKA 8120039
JAPAN

EUROPE

UNIT F, WINSTON BUSINESS
PARK
CHURCHILL WAY #27156
ZIP CODE: S35 2PS, SHEFFIELD
UNITED KINGDOM